

**CBNCoat Drills | Solid CBN Reamers****Die and Mold****Industry****Automotive****Mechanical Engineering****Medical Technology****Micro Technology****Aerospace****Engineering**

About us

Diamond Tooling Systems

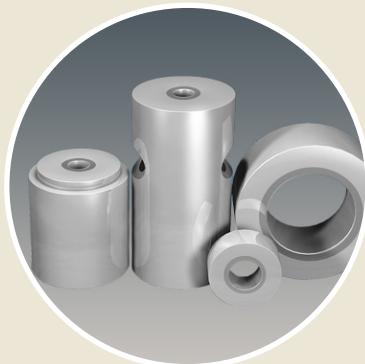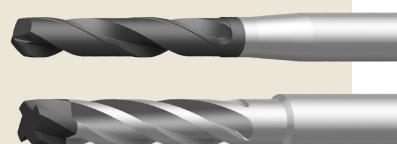

Welcome to DTS - Diamond Tooling Systems GmbH!

Based in Kaiserslautern - Germany - we have specialized in the development, production and distribution of precision tools equipped with ultrahard cutting materials, such as PCD (polycrystalline diamond), CVD-D (CVD thickfilm diamond), UltraDiamond (monocrystalline binderless diamond) and CBN (cubic boron nitride). As a leading manufacturer for tools with laser cutting edges, we offer machining solutions in the areas of turning, milling, grooving, drilling, reaming, threading, and tool holding.

To be able to economically process ultra-hard cutting materials such as PCD, CVD-D and CBN on precision tools we realized early on that we would have to move away from the traditional production technology of „grinding“ to new technologies such as the „laser removal process“. This decision has contributed to the fact that our customers regard us, DTS GmbH, as the pioneer and leading manufacturer of laser tools for machining.

Ultra-hard high-performance cutting materials have a key function in metal-cutting manufacturing. Precision tools equipped with ultra-hard cutting materials are products that require a great deal of explanation. The economical use of the cutting materials is only ensured if the machining process and the cutting material are coordinated with each other.

This is exactly where we at DTS - Diamond Tooling Systems GmbH - step in: Tools and processes are subjected to a comprehensive analysis by our experienced application engineers. Subsequently, the new process optimization is presented to the customer and in the next step, it is implemented in their production. Only in that way is it possible to exploit the optimum potential of our high-tech cutting materials.

Our experienced application engineers are also available to advise you during ongoing production. This close cooperation and mutual trust is the basis of our success.

With more than 25 years of optimization experience in the processing industry, this is where we see our strength!

Contents

Drills and CBN Reamers

Overview

| | |
|---|----|
| Ultrahard Cutting Materials at a Glance | 04 |
| Our Cutting Material CBN at a Glance | 06 |
| Application examples - for drilling and reaming | 07 |
| Our Cutting Material Assignment | 08 |
| Our Drills and Reamers at a Glance | 09 |

Products

| | |
|-------------------------|----|
| CBNCoat Drills | 10 |
| Solid CBN Reamers | 18 |

Technical Attachment

| | |
|---|----|
| Cutting Parameters | 22 |
| Formulas | 24 |
| Copyright and Safety Instructions | 31 |




You can also get all of our products via our online shop - anytime, fast and easy.
www.diamond-tools24.com

PASSION FOR DIAMOND...

ultrahard cutting materials at a glance

... is not just a slogan for us - we live this passion in our daily dealings with our customers and we are your partner when it comes to diamond or CBN tools.

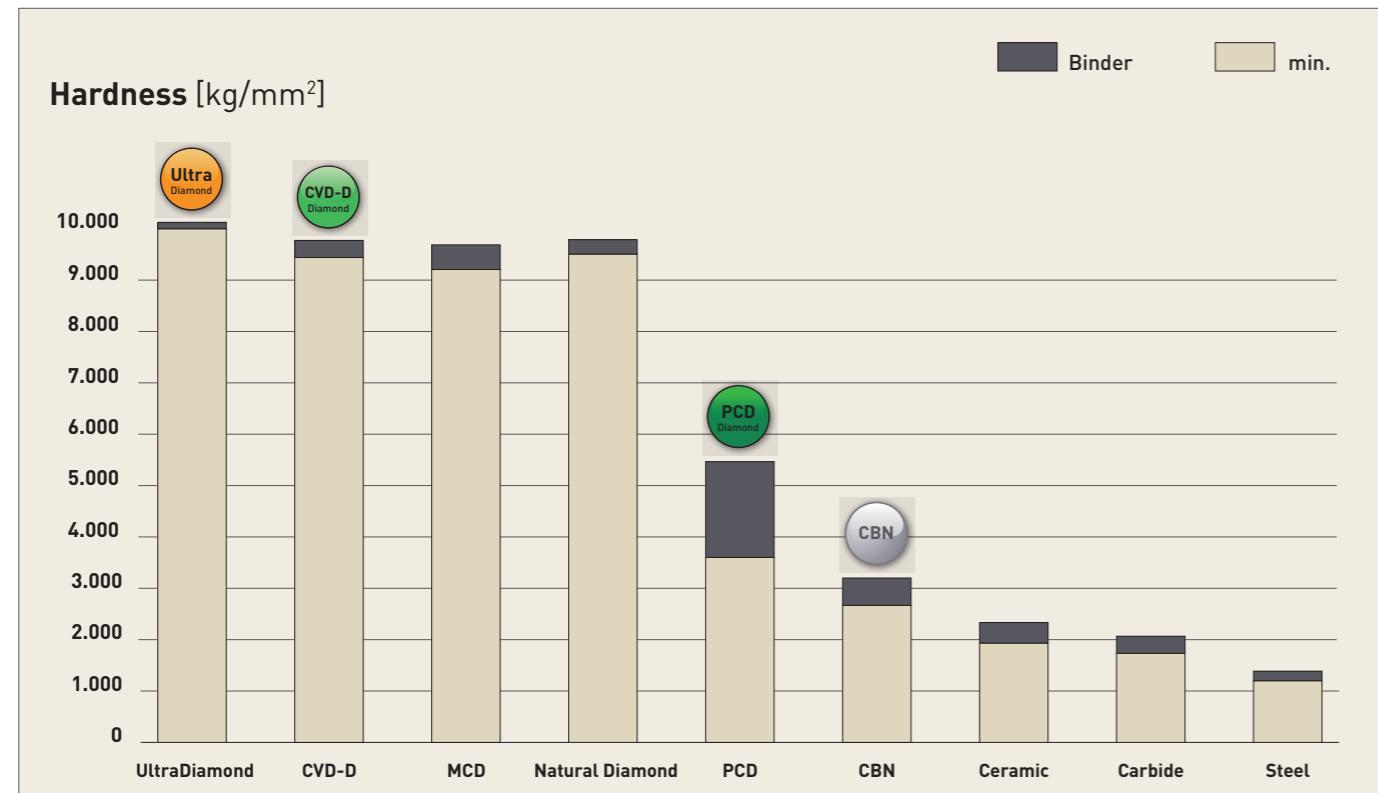

Polycrystalline diamond (PCD)

The well-known Standard Diamond

PCD is a synthetically produced, extremely tough, intergrown mass of diamond particles with a random orientation in a metal matrix. It is produced by sintering selected diamond particles under high pressure and high temperatures.

Graphite serves as a catalyst allowing the PDC crystals to intergrow. PCD has a high thermal conductivity and good heat dissipation away from the cutting edge. In addition, PCD has the highest bending fracture strength of all cutting materials.

PCD is very well suited for machining aluminum with a Si content of up to 10% and/or other abrasive fillers. The thermal hardness is about 750°C. The areas of application are like those of CVD thick-film diamond, but CVD thick film has a higher cost effectiveness with hard-brittle materials or aluminum from a Si content of 10%.

CVD-Thickfilm Diamond (CVD-D)

The Star among Diamond Cutting Materials

For the machining of hard-brittle materials such as Ceramics, glass, glass-Ceramics, tungsten Carbide, MMC and fiber-reinforced composites such as CFRP and GFRP. Due to the lack of a bonding matrix, the diamond content is much higher than with PCD. In the group of ultra-hard cutting materials, binderless CVD-D is one of the hardest man-made diamond cutting materials.

CVD-D is characterized by high hardness as well as high wear resistance. These properties make CVD-D the perfect cutting material for machining abrasive materials. Compared to PCD, which is damaged by the abrasive particles due to its soft metallic binder phase, the CVD-D cutting edge remains stable due to its binderless anchoring in the diamond matrix.

With the correct use of CVD-D, the tool life can be increased by up to 10 times (and even more) compared to PCD!

Binderless Diamond (UltraDiamond)

The hardest Mono Crystal

Single-crystal elements are laser-cut from diamond blanks in a defined orientation using laser segmentation technology. This new technology makes it possible, in addition to polycrystalline cutting materials such as PCD and CVD-D, to also braze a monocrystal (UltraDiamond) under high vacuum on any tool carrier. Compared to PCD, the tool life can be increased by approx. 15 to 25 times and compared to CVD-D by approx. 2 to 5 times.

The areas of application are similar to PCD and CVD-D, but this monocrystalline cutting material offers a further significant increase in tool life in all applications where PCD and CVD-D reach the limits of economic viability. The UltraDiamond cutting material makes economical machining of very hard, highly brittle materials such as Ceramics, glass, glass-Ceramics and hard metals with low cobalt binder and nickel binder (<10%) possible.

Polycrystalline Cubic Boron Nitride (CBN)

Chemically resistant and stable at high temperatures

of up to 1,400°C. Boron nitride powder is the starting point for the production of CBN, which has been available since the end of the 1960s. It is produced under high pressure and at temperatures of over 1,500°C and the many different substrates are specifically adapted to the final application.


CBN is now considered the second hardest material after diamond cutting materials!

The applications of CBN take place in the automotive industry, aerospace, tool and die and mold making as well as in mechanical engineering. The wide range as cutting and abrasive material includes hardened steels, cast irons, chilled cast iron, sintered materials, stellites, nickel- and cobalt-based superalloys. In many applications, cubic boron nitride is preferred to diamond cutting materials because it is absolutely stable in air at temperatures up to 1,400°C. Diamond, on the other hand, begins to decompose at a temperature of approx. 750°C. Compared to PCD, CBN is also characterized by its chemical resistance to ferrous materials.

Our Cutting Materials

and their main areas of application at a glance

Below you will find an overview of our CBN cutting material for our drills and reamers.










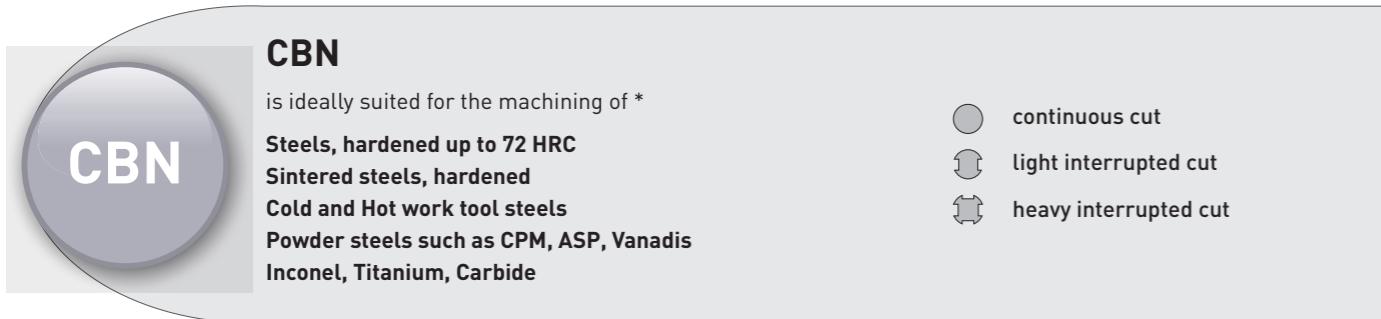


Application Examples

our cutting edges in use

Not only theory - we would like to show you our tools in action. Below you will find a selection of our CBN application videos. Click on the QR code for more information and the video.

Also visit our YouTube Channel at [dts-gmbh!](#)

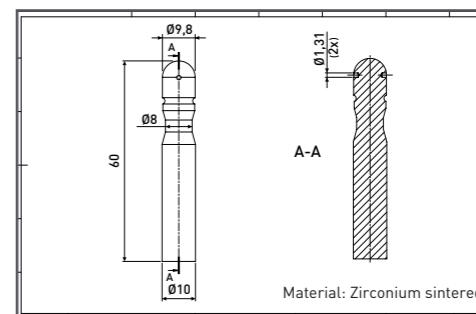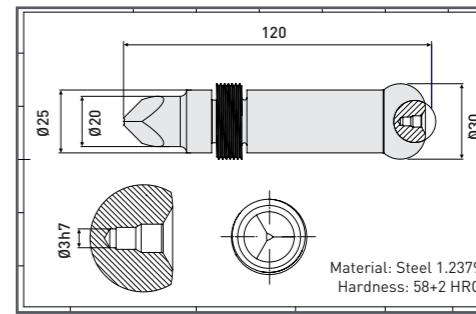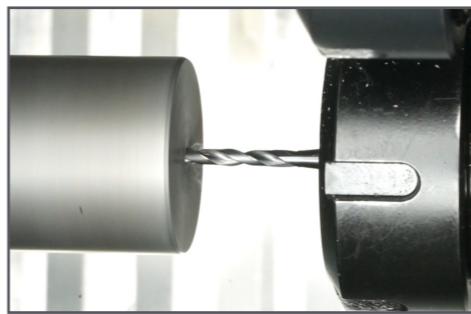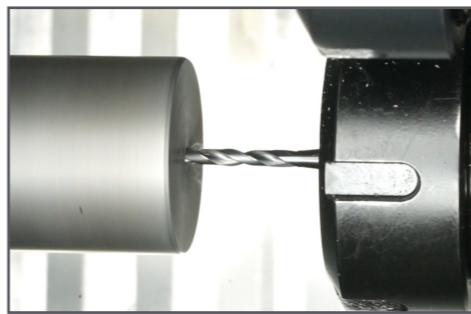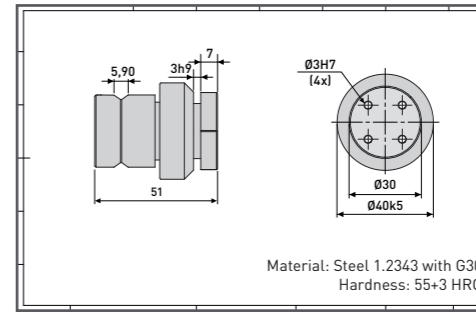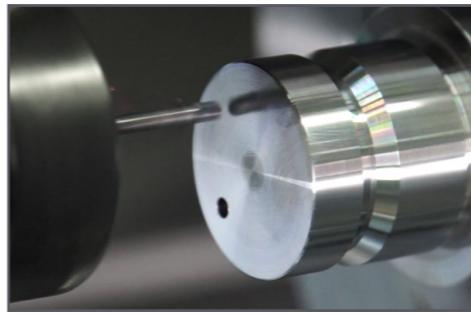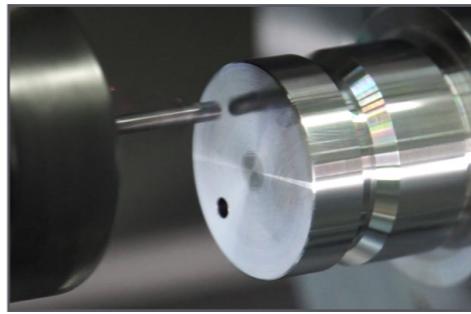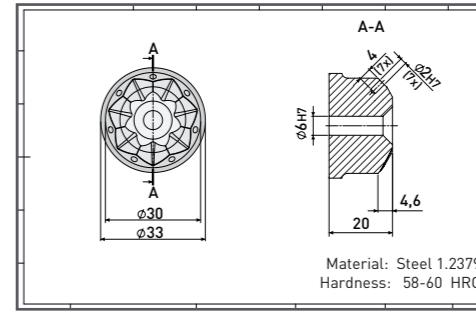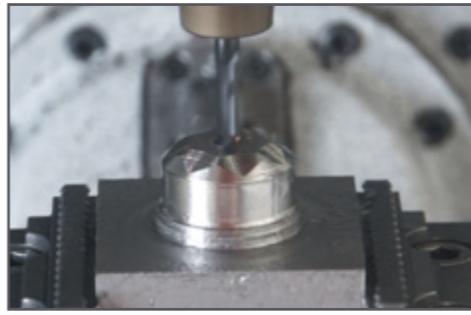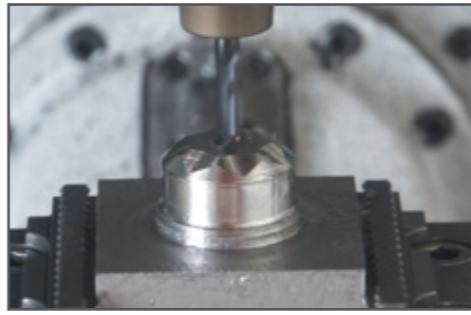

* all other applications can be found in the complete cutting material assignment from page 8

Our Cutting Materials Assignment

about the materials

You cannot find your material in the table?

We are glad to help you by phone or by mail!

Phone: +49 (0) 6301 32011-0

Mail: info@diamond-toolingsystems.com

1. Choice

| ISO | Materials | DTS Grades | |
|----------|--|-------------------------------------|-------------------------------------|
| | | CBNCoat Drills | CBNSolid Reamers |
| H | Cold Work Steel, hardened to 72 HRC | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| | PM- Steels (ASP, CPM, Vanadis, Böhler) | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| | Steel, hardened to 72 HRC | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| | Hot Work Steel, hardened to 72 HRC | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| | Tool Steel, hardened to 72 HRC | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| P | Sintered Steel | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| | Sintered Steel, hardened | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| K | Grey Cast Iron (GG) | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| | Ductile Cast Iron (GGG) | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| S | Shell Chilled Cast Iron | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| | Ni-, Co-, Fe- u. Cr-Alloys | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| M | Titanium Alloys | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| | Stainless Steel, hardened | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| N | Carbide, > 20% Co | <input type="checkbox"/> | <input checked="" type="checkbox"/> |

Overview of both systems

for drilling and reaming

CBNCoat Drills

Ø 2,00 up to Ø 12,00



A new coating called „CBNCoat“ has been developed for our CBNCoat Drills, which enables us to economically machine hardened materials up to 68HRC. Due to this new special coating, drilling of significantly softer materials is also possible without any problems.

Due to the special grinding, separate pre-centering is no longer necessary in many cases.

Overview of the main areas of application:

- ✓ Steel, hardened up to 68 HRC
- ✓ Tool steel, hardened up to 68 HRC
- ✓ Inconel
- ✓ Titanium

Solid CBN Reibahle

Ø 1,50 up to Ø 6,03




Our Solid CBN Reamers are developed for use in high hardness materials. They can be used to produce H5, H6 and H7 bores in materials with a hardness of 50-72 HRC.

Due to the helix angle we guarantee an ideal chip removal and roundness!

Overview of the main areas of application:

- ✓ Steel, hardened up to 72 HRC
- ✓ Tool steel, hardened up to 72 HRC
- ✓ Powder metallurgical steels, hardened up to 72 HRC
- ✓ Inconel
- ✓ Titanium
- ✓ Carbide

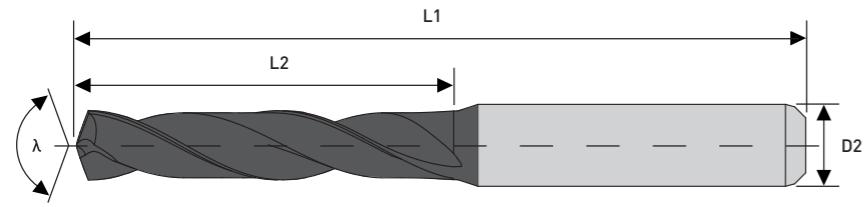

Cutting edges: 2
Coated
Shank according to DIN 6335-HA
Norm: DIN 6537 K
Shaft tolerance: D2h6
Blade tolerance D1h7

| D1 | L2 | L1 | D2 | λ | Item No. |
|------|-------|-------|------|------|-------------|
| 2,00 | 20,00 | 55,00 | 4,00 | 140° | B05980-0005 |
| 2,10 | 20,00 | 55,00 | 4,00 | 140° | B05980-0010 |
| 2,20 | 20,00 | 55,00 | 4,00 | 140° | B05980-0015 |
| 2,30 | 20,00 | 55,00 | 4,00 | 140° | B05980-0020 |
| 2,40 | 20,00 | 55,00 | 4,00 | 140° | B05980-0025 |
| 2,50 | 20,00 | 55,00 | 4,00 | 140° | B05980-0030 |
| 2,55 | 20,00 | 55,00 | 4,00 | 140° | B05980-0035 |
| 2,60 | 20,00 | 55,00 | 4,00 | 140° | B05980-0040 |
| 2,70 | 20,00 | 55,00 | 4,00 | 140° | B05980-0045 |
| 2,80 | 20,00 | 55,00 | 4,00 | 140° | B05980-0050 |
| 2,90 | 20,00 | 55,00 | 4,00 | 140° | B05980-0055 |
| 3,00 | 20,00 | 62,00 | 6,00 | 140° | B05980-0060 |
| 3,10 | 20,00 | 62,00 | 6,00 | 140° | B05980-0065 |
| 3,20 | 20,00 | 62,00 | 6,00 | 140° | B05980-0070 |
| 3,30 | 20,00 | 62,00 | 6,00 | 140° | B05980-0075 |

| D1 | L2 | L1 | D2 | λ | Item No. |
|------|-------|-------|------|------|-------------|
| 3,40 | 20,00 | 62,00 | 6,00 | 140° | B05980-0080 |
| 3,50 | 20,00 | 62,00 | 6,00 | 140° | B05980-0085 |
| 3,60 | 20,00 | 62,00 | 6,00 | 140° | B05980-0090 |
| 3,70 | 20,00 | 62,00 | 6,00 | 140° | B05980-0095 |
| 3,80 | 24,00 | 66,00 | 6,00 | 140° | B05980-0100 |
| 3,90 | 24,00 | 66,00 | 6,00 | 140° | B05980-0105 |
| 4,00 | 24,00 | 66,00 | 6,00 | 140° | B05980-0110 |
| 4,10 | 24,00 | 66,00 | 6,00 | 140° | B05980-0115 |
| 4,20 | 24,00 | 66,00 | 6,00 | 140° | B05980-0120 |
| 4,30 | 24,00 | 66,00 | 6,00 | 140° | B05980-0125 |
| 4,40 | 24,00 | 66,00 | 6,00 | 140° | B05980-0130 |
| 4,50 | 24,00 | 66,00 | 6,00 | 140° | B05980-0135 |
| 4,60 | 24,00 | 66,00 | 6,00 | 140° | B05980-0140 |
| 4,70 | 24,00 | 66,00 | 6,00 | 140° | B05980-0145 |
| 4,80 | 28,00 | 66,00 | 6,00 | 140° | B05980-0150 |
| 4,90 | 28,00 | 66,00 | 6,00 | 140° | B05980-0155 |
| 5,00 | 28,00 | 66,00 | 6,00 | 140° | B05980-0160 |
| 5,10 | 28,00 | 66,00 | 6,00 | 140° | B05980-0165 |
| 5,20 | 28,00 | 66,00 | 6,00 | 140° | B05980-0170 |
| 5,30 | 28,00 | 66,00 | 6,00 | 140° | B05980-0175 |
| 5,40 | 28,00 | 66,00 | 6,00 | 140° | B05980-0180 |
| 5,50 | 28,00 | 66,00 | 6,00 | 140° | B05980-0185 |
| 5,60 | 28,00 | 66,00 | 6,00 | 140° | B05980-0190 |

Application range:

- CBNCoat Steel hardened and Tool Steel up to 68 HRC, powder metallurgical Steel, Grey Cast Iron (GCI), Ductile Cast Iron (DCI) ...

You will find further application ranges in the detailed overview on page 8.




Special tools on request for you!
Please send inquiries to info@diamond-toolingsystems.com



All our products are also available in the online shop.
Visit us at diamond-tools24.com

Subject to technical changes.

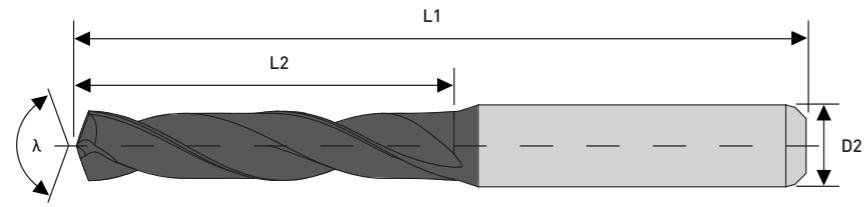

Cutting edges: 2
Coated
Shank according to DIN 6335-HA
Norm: DIN 6537 K
Shaft tolerance: D2h6
Blade tolerance D1h7

| D1 | L2 | L1 | D2 | λ | Item No. |
|------|-------|-------|------|------|-------------|
| 5,70 | 28,00 | 66,00 | 6,00 | 140° | B05980-0195 |
| 5,80 | 28,00 | 66,00 | 6,00 | 140° | B05980-0200 |
| 5,90 | 28,00 | 66,00 | 6,00 | 140° | B05980-0205 |
| 6,00 | 28,00 | 66,00 | 6,00 | 140° | B05980-0210 |
| 6,10 | 34,00 | 79,00 | 8,00 | 140° | B05980-0215 |
| 6,20 | 34,00 | 79,00 | 8,00 | 140° | B05980-0220 |
| 6,30 | 34,00 | 79,00 | 8,00 | 140° | B05980-0225 |
| 6,40 | 34,00 | 79,00 | 8,00 | 140° | B05980-0230 |
| 6,50 | 34,00 | 79,00 | 8,00 | 140° | B05980-0235 |
| 6,60 | 34,00 | 79,00 | 8,00 | 140° | B05980-0240 |
| 6,70 | 34,00 | 79,00 | 8,00 | 140° | B05980-0245 |
| 6,80 | 34,00 | 79,00 | 8,00 | 140° | B05980-0250 |
| 6,90 | 34,00 | 79,00 | 8,00 | 140° | B05980-0255 |
| 7,00 | 34,00 | 79,00 | 8,00 | 140° | B05980-0260 |
| 7,10 | 41,00 | 79,00 | 8,00 | 140° | B05980-0265 |

| D1 | L2 | L1 | D2 | λ | Item No. |
|------|-------|-------|-------|------|-------------|
| 7,20 | 41,00 | 79,00 | 8,00 | 140° | B05980-0270 |
| 7,30 | 41,00 | 79,00 | 8,00 | 140° | B05980-0275 |
| 7,40 | 41,00 | 79,00 | 8,00 | 140° | B05980-0280 |
| 7,50 | 41,00 | 79,00 | 8,00 | 140° | B05980-0285 |
| 7,60 | 41,00 | 79,00 | 8,00 | 140° | B05980-0290 |
| 7,70 | 41,00 | 79,00 | 8,00 | 140° | B05980-0295 |
| 7,80 | 41,00 | 79,00 | 8,00 | 140° | B05980-0300 |
| 7,90 | 41,00 | 79,00 | 8,00 | 140° | B05980-0305 |
| 8,00 | 41,00 | 79,00 | 8,00 | 140° | B05980-0310 |
| 8,10 | 47,00 | 89,00 | 10,00 | 140° | B05980-0315 |
| 8,20 | 47,00 | 89,00 | 10,00 | 140° | B05980-0320 |
| 8,30 | 47,00 | 89,00 | 10,00 | 140° | B05980-0325 |
| 8,40 | 47,00 | 89,00 | 10,00 | 140° | B05980-0330 |
| 8,50 | 47,00 | 89,00 | 10,00 | 140° | B05980-0335 |
| 8,60 | 47,00 | 89,00 | 10,00 | 140° | B05980-0340 |
| 8,70 | 47,00 | 89,00 | 10,00 | 140° | B05980-0345 |
| 8,80 | 47,00 | 89,00 | 10,00 | 140° | B05980-0350 |
| 8,90 | 47,00 | 89,00 | 10,00 | 140° | B05980-0355 |
| 9,00 | 47,00 | 89,00 | 10,00 | 140° | B05980-0360 |
| 9,10 | 47,00 | 89,00 | 10,00 | 140° | B05980-0365 |
| 9,20 | 47,00 | 89,00 | 10,00 | 140° | B05980-0370 |
| 9,30 | 47,00 | 89,00 | 10,00 | 140° | B05980-0375 |
| 9,40 | 47,00 | 89,00 | 10,00 | 140° | B05980-0380 |

Application range:

- CBNCoat Steel hardened and Tool Steel up to 68 HRC, powder metallurgical Steel, Grey Cast Iron (GCI), Ductile Cast Iron (DCI) ...

You will find further application ranges in the detailed overview on page 8.





Special tools on request for you!
Please send inquiries to info@diamond-toolingsystems.com



All our products are also available in the online shop.
Visit us at diamond-tools24.com



Subject to technical changes.

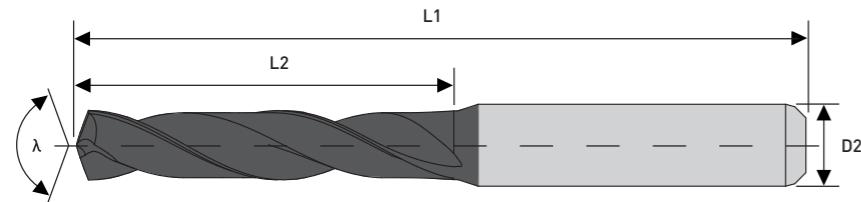

Cutting edges: 2
Coated

Shank according to DIN 6335-HA
Norm: DIN 6537 K

Shaft tolerance: D2h6
Blade tolerance D1h7

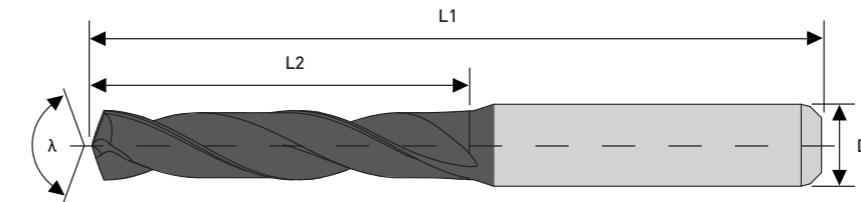

Cutting edges: 2
Coated

Shank according to DIN 6335-HA
Norm: DIN 6537 K

Shaft tolerance: D2h6
Blade tolerance D1h7

| D1 | L2 | L1 | D2 | λ | Item No. |
|-------|-------|--------|-------|------|-------------|
| 9,50 | 47,00 | 89,00 | 10,00 | 140° | B05980-0385 |
| 9,60 | 47,00 | 89,00 | 10,00 | 140° | B05980-0390 |
| 9,70 | 47,00 | 89,00 | 10,00 | 140° | B05980-0395 |
| 9,80 | 47,00 | 89,00 | 10,00 | 140° | B05980-0400 |
| 9,90 | 47,00 | 89,00 | 10,00 | 140° | B05980-0405 |
| 10,00 | 47,00 | 89,00 | 10,00 | 140° | B05980-0410 |
| 10,10 | 55,00 | 102,00 | 12,00 | 140° | B05980-0415 |
| 10,20 | 55,00 | 102,00 | 12,00 | 140° | B05980-0420 |
| 10,30 | 55,00 | 102,00 | 12,00 | 140° | B05980-0425 |
| 10,40 | 55,00 | 102,00 | 12,00 | 140° | B05980-0430 |
| 10,50 | 55,00 | 102,00 | 12,00 | 140° | B05980-0435 |
| 10,60 | 55,00 | 102,00 | 12,00 | 140° | B05980-0440 |
| 10,70 | 55,00 | 102,00 | 12,00 | 140° | B05980-0445 |
| 10,80 | 55,00 | 102,00 | 12,00 | 140° | B05980-0450 |
| 10,90 | 55,00 | 102,00 | 12,00 | 140° | B05980-0455 |

| D1 | L2 | L1 | D2 | λ | Item No. |
|-------|-------|--------|-------|------|-------------|
| 11,00 | 55,00 | 102,00 | 12,00 | 140° | B05980-0460 |
| 11,10 | 55,00 | 102,00 | 12,00 | 140° | B05980-0465 |
| 11,20 | 55,00 | 102,00 | 12,00 | 140° | B05980-0470 |
| 11,30 | 55,00 | 102,00 | 12,00 | 140° | B05980-0475 |
| 11,40 | 55,00 | 102,00 | 12,00 | 140° | B05980-0480 |
| 11,50 | 55,00 | 102,00 | 12,00 | 140° | B05980-0485 |
| 11,60 | 55,00 | 102,00 | 12,00 | 140° | B05980-0490 |
| 11,70 | 55,00 | 102,00 | 12,00 | 140° | B05980-0495 |
| 11,80 | 55,00 | 102,00 | 12,00 | 140° | B05980-0500 |
| 11,90 | 55,00 | 102,00 | 12,00 | 140° | B05980-0505 |
| 12,00 | 55,00 | 102,00 | 12,00 | 140° | B05980-0510 |

From diameter Ø11.50 mm up to 20.00 mm available on request.

Application range:

- CBNCoat Steel hardened and Tool Steel up to 68 HRC, powder metallurgical Steel, Grey Cast Iron (GCI), Ductile Cast Iron (DCI) ...

You will find further application ranges in the detailed overview on page 8.




Special tools on request for you!
Please send inquiries to info@diamond-toolingsystems.com




All our products are also available in the online shop.
Visit us at diamond-tools24.com

Subject to technical changes.

Your Notes

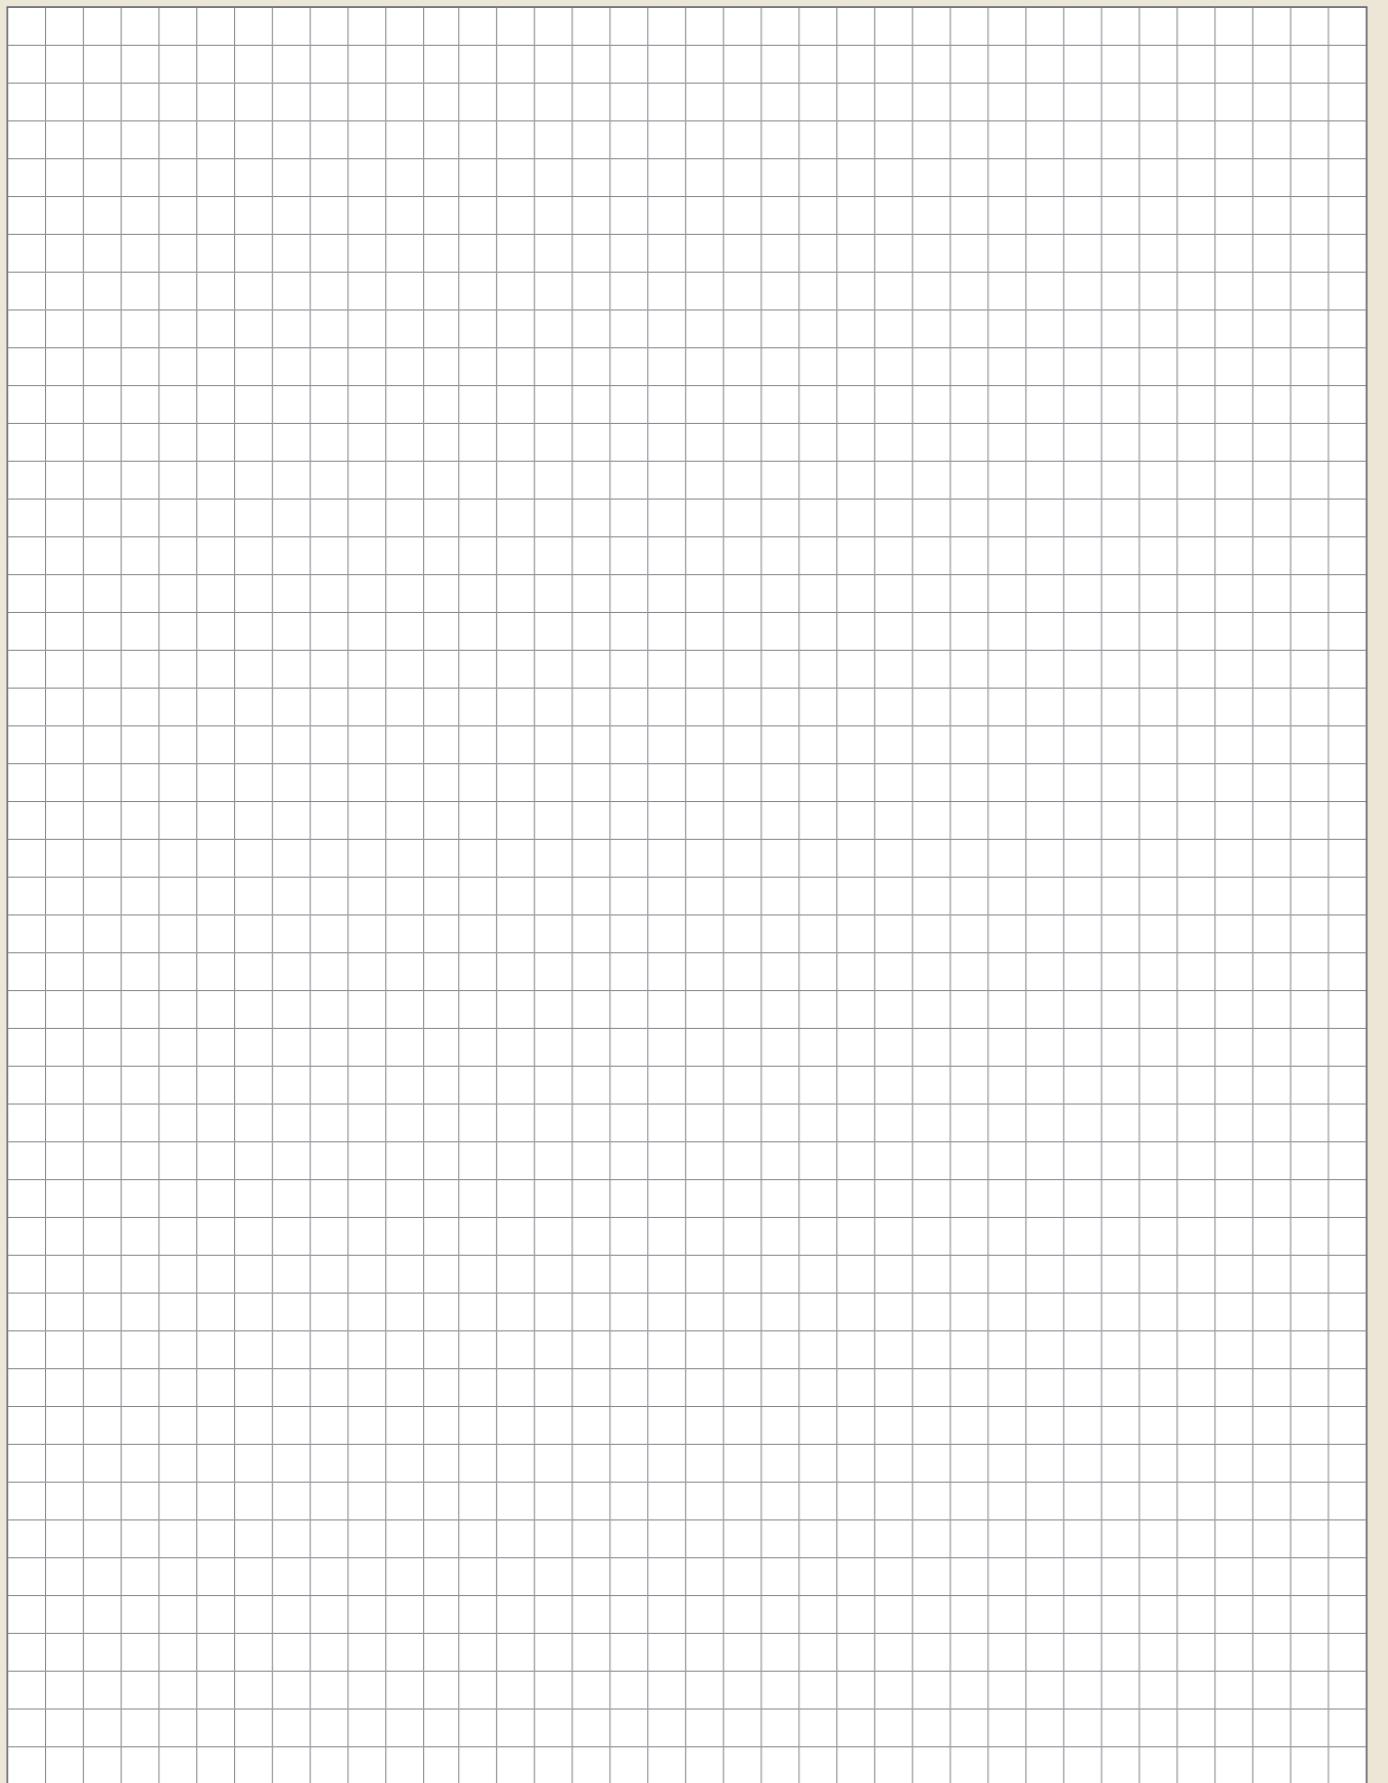A large grid of squares, approximately 20 columns by 25 rows, designed for handwritten notes.


Your Notes

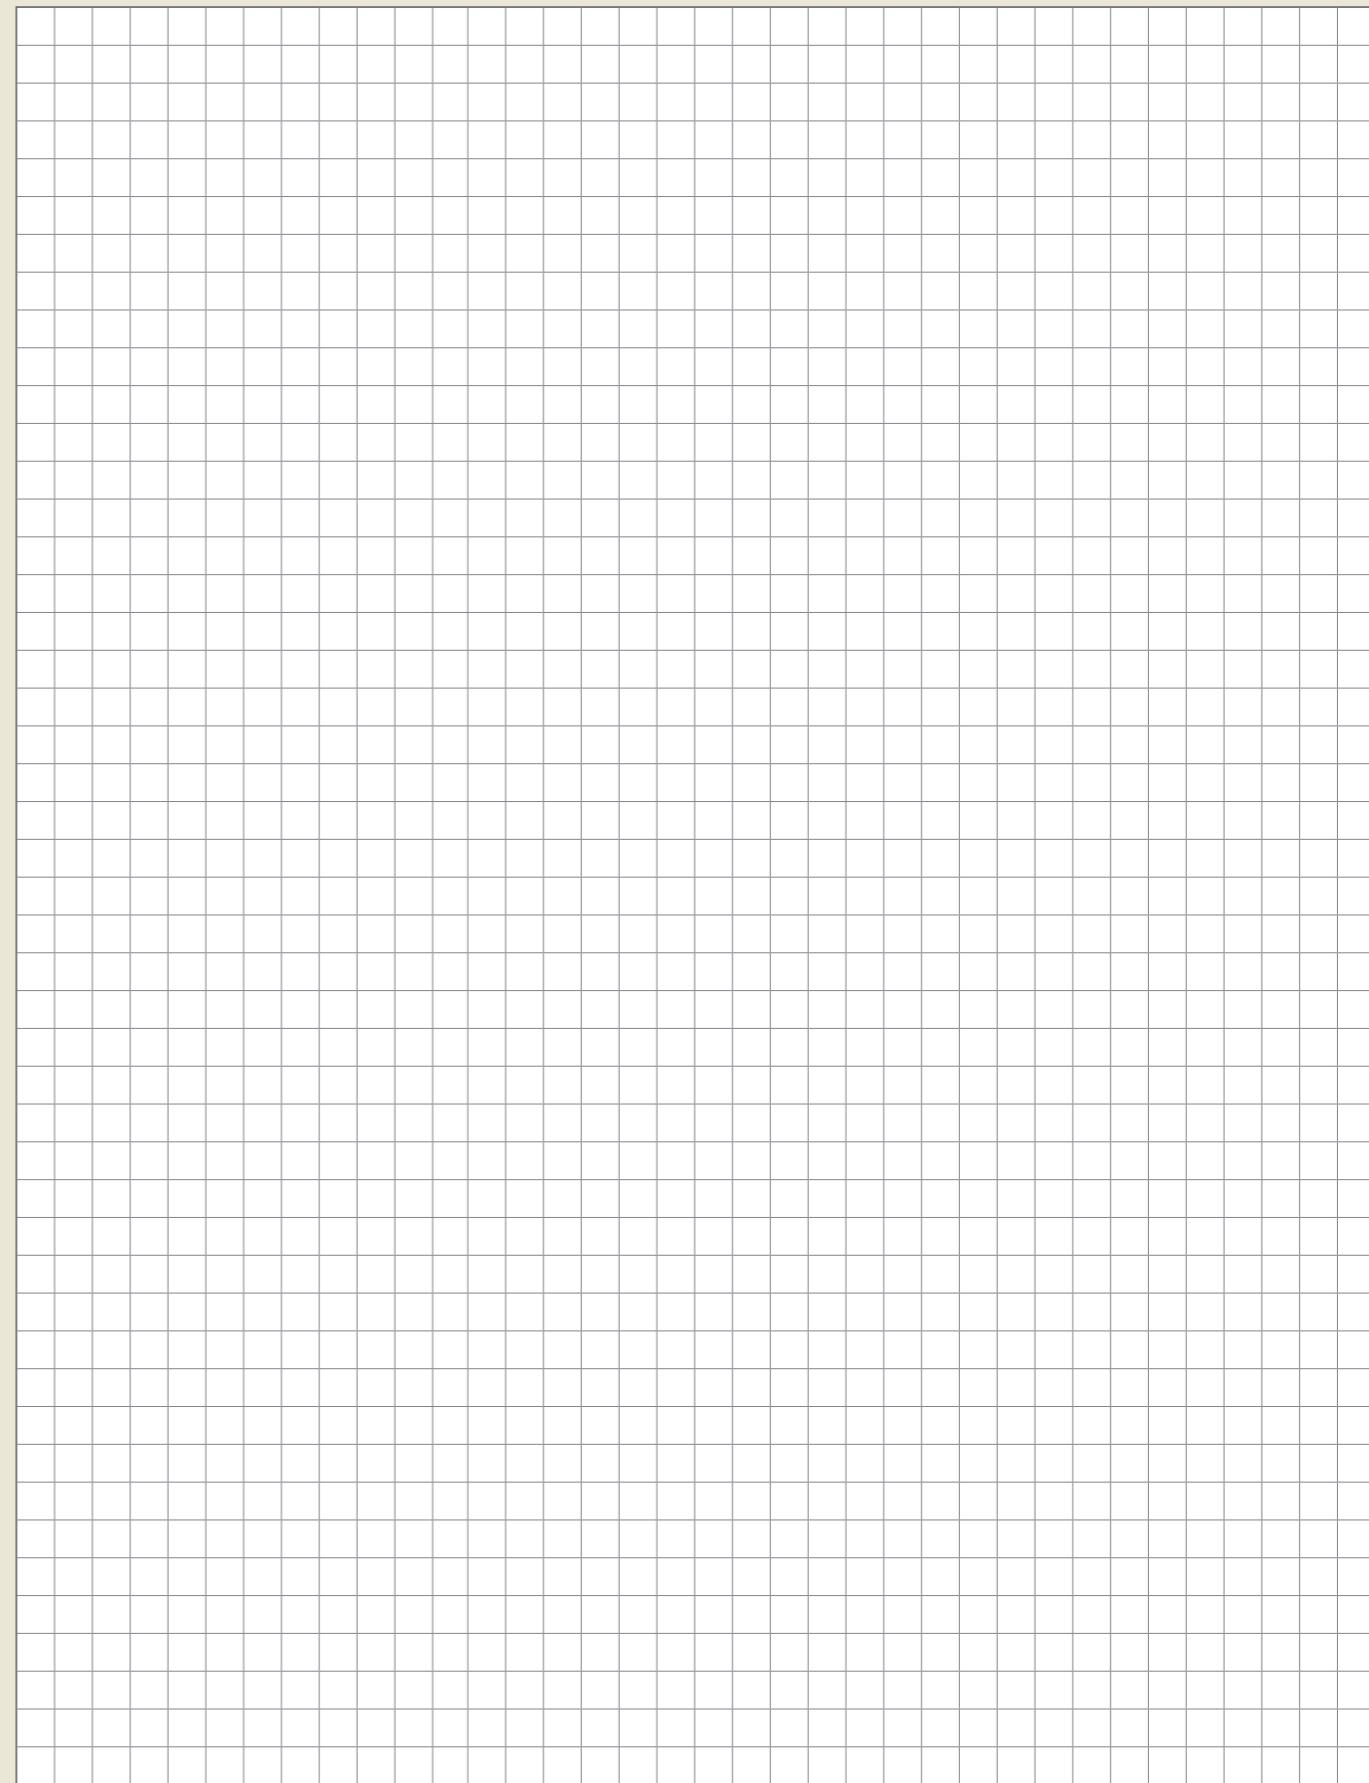A large grid of squares, approximately 20 columns by 25 rows, designed for handwritten notes.

Solid CBN Reamers

with helix angle

for hard reaming up to 72 HRC

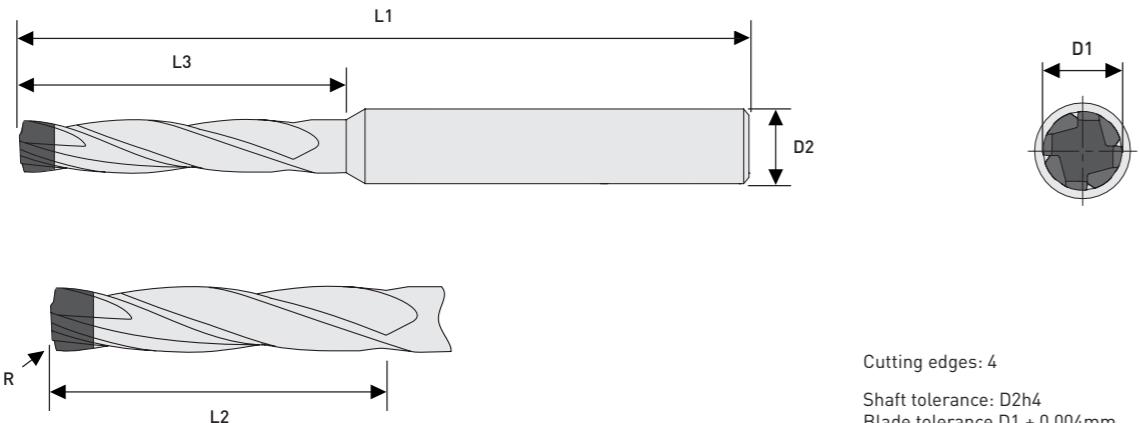

| D1 | L3 | L2 | L1 | D2 | R | Item No. |
|------|-------|-------|-------|------|------|-------------|
| 1,50 | 10,00 | 8,00 | 48,00 | 3,00 | 0,20 | RA5940-0002 |
| 1,60 | 10,00 | 8,00 | 48,00 | 3,00 | 0,20 | RA5940-0004 |
| 1,70 | 10,00 | 8,00 | 48,00 | 3,00 | 0,20 | RA5940-0006 |
| 1,80 | 10,00 | 8,00 | 48,00 | 3,00 | 0,20 | RA5940-0008 |
| 1,90 | 10,00 | 8,00 | 48,00 | 3,00 | 0,20 | RA5940-0010 |
| 1,98 | 15,00 | 13,00 | 48,00 | 3,00 | 0,20 | RA5940-0012 |
| 1,99 | 15,00 | 13,00 | 48,00 | 3,00 | 0,20 | RA5940-0014 |
| 2,00 | 15,00 | 13,00 | 48,00 | 3,00 | 0,20 | RA5940-0016 |
| 2,01 | 15,00 | 13,00 | 48,00 | 3,00 | 0,20 | RA5940-0018 |
| 2,02 | 15,00 | 13,00 | 48,00 | 3,00 | 0,20 | RA5940-0020 |
| 2,03 | 15,00 | 13,00 | 48,00 | 3,00 | 0,20 | RA5940-0022 |
| 2,10 | 15,00 | 13,00 | 48,00 | 3,00 | 0,30 | RA5940-0024 |
| 2,20 | 15,00 | 13,00 | 48,00 | 3,00 | 0,30 | RA5940-0026 |
| 2,30 | 15,00 | 13,00 | 48,00 | 3,00 | 0,30 | RA5940-0028 |
| 2,40 | 15,00 | 13,00 | 48,00 | 3,00 | 0,30 | RA5940-0030 |

| D1 | L3 | L2 | L1 | D2 | R | Item No. |
|------|-------|-------|-------|------|------|-------------|
| 2,50 | 15,00 | 13,00 | 48,00 | 3,00 | 0,30 | RA5940-0032 |
| 2,60 | 15,00 | 13,00 | 48,00 | 3,00 | 0,30 | RA5940-0034 |
| 2,70 | 15,00 | 13,00 | 48,00 | 3,00 | 0,30 | RA5940-0036 |
| 2,80 | 15,00 | 13,00 | 48,00 | 3,00 | 0,30 | RA5940-0038 |
| 2,90 | 15,00 | 13,00 | 48,00 | 3,00 | 0,30 | RA5940-0040 |
| 2,98 | 20,00 | 18,00 | 58,00 | 3,00 | 0,30 | RA5940-0042 |
| 2,99 | 20,00 | 18,00 | 58,00 | 3,00 | 0,30 | RA5940-0044 |
| 3,00 | 20,00 | 18,00 | 58,00 | 3,00 | 0,30 | RA5940-0046 |
| 3,01 | 20,00 | 18,00 | 58,00 | 3,00 | 0,30 | RA5940-0048 |
| 3,02 | 20,00 | 18,00 | 58,00 | 3,00 | 0,30 | RA5940-0050 |
| 3,03 | 20,00 | 18,00 | 58,00 | 3,00 | 0,30 | RA5940-0052 |
| 3,10 | 20,00 | 18,00 | 58,00 | 4,00 | 0,30 | RA5940-0054 |
| 3,20 | 20,00 | 18,00 | 58,00 | 4,00 | 0,30 | RA5940-0056 |
| 3,30 | 20,00 | 18,00 | 58,00 | 4,00 | 0,30 | RA5940-0058 |
| 3,40 | 20,00 | 18,00 | 58,00 | 4,00 | 0,30 | RA5940-0060 |
| 3,50 | 20,00 | 18,00 | 58,00 | 4,00 | 0,30 | RA5940-0062 |
| 3,60 | 20,00 | 18,00 | 58,00 | 4,00 | 0,30 | RA5940-0064 |
| 3,70 | 20,00 | 18,00 | 58,00 | 4,00 | 0,30 | RA5940-0066 |
| 3,80 | 20,00 | 18,00 | 58,00 | 4,00 | 0,30 | RA5940-0068 |
| 3,90 | 20,00 | 18,00 | 58,00 | 4,00 | 0,30 | RA5940-0070 |
| 3,98 | 25,00 | 23,00 | 58,00 | 4,00 | 0,30 | RA5940-0072 |
| 3,99 | 25,00 | 23,00 | 58,00 | 4,00 | 0,30 | RA5940-0074 |
| 4,00 | 25,00 | 23,00 | 58,00 | 4,00 | 0,40 | RA5940-0076 |

Application range:

- CBN** Steel hardened and Tool Steel up to 72 HRC, powder metallurgical Steel, Sintered steel hardened, Grey Cast Iron hardened, Carbide ...

You will find further application ranges in the detailed overview on page 8.



Special tools on request for you!
Please send inquiries to info@diamond-toolingsystems.com




All our products are also available in the online shop.
Visit us at diamond-tools24.com

Subject to technical changes.

Solid CBN Reamers

with helix angle

for hard reaming up to 72 HRC

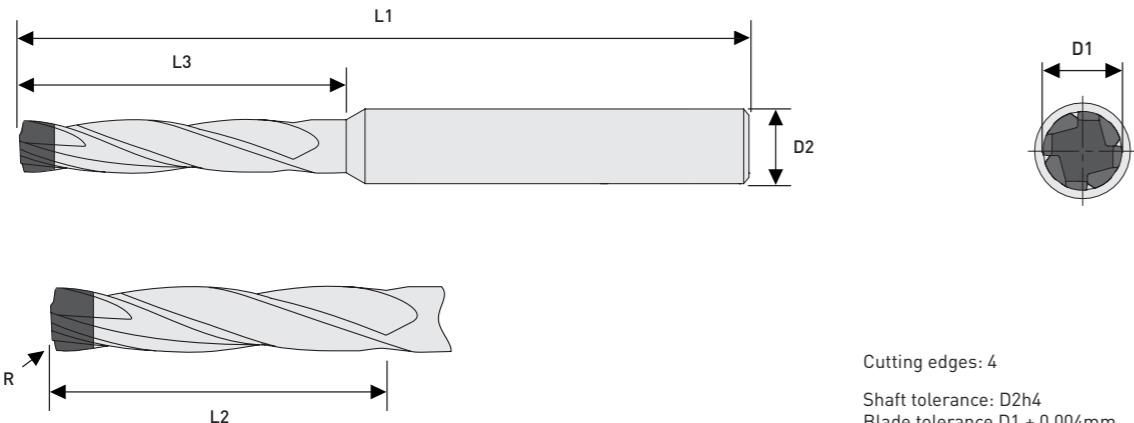

| D1 | L3 | L2 | L1 | D2 | R | Item No. |
|------|-------|-------|-------|------|------|-------------|
| 4,01 | 25,00 | 23,00 | 58,00 | 4,00 | 0,40 | RA5940-0078 |
| 4,02 | 25,00 | 23,00 | 58,00 | 4,00 | 0,40 | RA5940-0080 |
| 4,03 | 25,00 | 23,00 | 58,00 | 4,00 | 0,40 | RA5940-0082 |
| 4,10 | 25,00 | 23,00 | 58,00 | 6,00 | 0,40 | RA5940-0084 |
| 4,20 | 25,00 | 23,00 | 58,00 | 6,00 | 0,40 | RA5940-0086 |
| 4,30 | 25,00 | 23,00 | 58,00 | 6,00 | 0,40 | RA5940-0088 |
| 4,40 | 25,00 | 23,00 | 58,00 | 6,00 | 0,40 | RA5940-0090 |
| 4,50 | 25,00 | 23,00 | 58,00 | 6,00 | 0,40 | RA5940-0092 |
| 4,60 | 25,00 | 23,00 | 58,00 | 6,00 | 0,40 | RA5940-0094 |
| 4,70 | 25,00 | 23,00 | 58,00 | 6,00 | 0,40 | RA5940-0096 |
| 4,80 | 25,00 | 23,00 | 58,00 | 6,00 | 0,40 | RA5940-0098 |
| 4,90 | 25,00 | 23,00 | 58,00 | 6,00 | 0,40 | RA5940-0100 |
| 4,98 | 30,00 | 28,00 | 68,00 | 6,00 | 0,40 | RA5940-0102 |
| 4,99 | 30,00 | 28,00 | 68,00 | 6,00 | 0,40 | RA5940-0104 |
| 5,00 | 30,00 | 28,00 | 68,00 | 6,00 | 0,50 | RA5940-0106 |

| D1 | L3 | L2 | L1 | D2 | R | Item No. |
|------|-------|-------|-------|------|------|-------------|
| 5,01 | 30,00 | 28,00 | 68,00 | 6,00 | 0,50 | RA5940-0108 |
| 5,02 | 30,00 | 28,00 | 68,00 | 6,00 | 0,50 | RA5940-0110 |
| 5,03 | 30,00 | 28,00 | 68,00 | 6,00 | 0,50 | RA5940-0112 |
| 5,10 | 30,00 | 28,00 | 68,00 | 6,00 | 0,50 | RA5940-0114 |
| 5,20 | 30,00 | 28,00 | 68,00 | 6,00 | 0,50 | RA5940-0116 |
| 5,30 | 30,00 | 28,00 | 68,00 | 6,00 | 0,50 | RA5940-0118 |
| 5,40 | 30,00 | 28,00 | 68,00 | 6,00 | 0,50 | RA5940-0120 |
| 5,50 | 30,00 | 28,00 | 68,00 | 6,00 | 0,50 | RA5940-0122 |
| 5,60 | 30,00 | 28,00 | 68,00 | 6,00 | 0,50 | RA5940-0124 |
| 5,70 | 30,00 | 28,00 | 68,00 | 6,00 | 0,50 | RA5940-0126 |
| 5,80 | 30,00 | 28,00 | 68,00 | 6,00 | 0,50 | RA5940-0128 |
| 5,90 | 30,00 | 28,00 | 68,00 | 6,00 | 0,50 | RA5940-0130 |
| 5,98 | 30,00 | 28,00 | 68,00 | 6,00 | 0,50 | RA5940-0132 |
| 5,99 | 30,00 | 28,00 | 68,00 | 6,00 | 0,50 | RA5940-0134 |
| 6,00 | 30,00 | 28,00 | 68,00 | 6,00 | 0,50 | RA5940-0136 |
| 6,01 | 30,00 | 28,00 | 68,00 | 6,00 | 0,50 | RA5940-0138 |
| 6,02 | 30,00 | 28,00 | 68,00 | 6,00 | 0,50 | RA5940-0140 |
| 6,03 | 30,00 | 28,00 | 68,00 | 6,00 | 0,50 | RA5940-0142 |

Application range:

- CBN** Steel hardened and Tool Steel up to 72 HRC, powder metallurgical Steel, Sintered steel hardened, Grey Cast Iron hardened, Carbide ...

You will find further application ranges in the detailed overview on page 8.



Special tools on request for you!
Please send inquiries to info@diamond-toolingsystems.com



All our products are also available in the online shop.
Visit us at diamond-tools24.com

Subject to technical changes.

Cutting Parameters

for our CBNCoat Drills



| | | CBNCoat Drills | | | | | | | | |
|---------------------------|------|---------------------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|
| Material | | | Ø 2 | Ø 3 | Ø 4 | Ø 5 | Ø 6 | Ø 8 | Ø 10 | Ø 12 |
| | | V _c [m/min] | F [mm/rev] |
| Steel, hardened 48-55 HRC | min. | 20 | 0,010 | 0,030 | 0,050 | 0,060 | 0,070 | 0,070 | 0,080 | 0,090 |
| | max. | 35 | 0,050 | 0,060 | 0,080 | 0,090 | 0,100 | 0,100 | 0,110 | 0,120 |
| Steel, hardened 55-60 HRC | min. | 10 | 0,010 | 0,030 | 0,050 | 0,060 | 0,070 | 0,070 | 0,080 | 0,090 |
| | max. | 25 | 0,050 | 0,060 | 0,080 | 0,090 | 0,100 | 0,100 | 0,110 | 0,120 |
| Steel, hardened 60-68 HRC | min. | 10 | 0,010 | 0,030 | 0,050 | 0,060 | 0,070 | 0,070 | 0,080 | 0,090 |
| | max. | 20 | 0,050 | 0,060 | 0,080 | 0,090 | 0,100 | 0,100 | 0,110 | 0,120 |
| Tool steel, up to 68 HRC | min. | 10 | 0,020 | 0,030 | 0,050 | 0,060 | 0,070 | 0,070 | 0,080 | 0,080 |
| | max. | 30 | 0,050 | 0,060 | 0,080 | 0,100 | 0,100 | 0,100 | 0,110 | 0,120 |

Cooling Recommended

While machining with CBNCoat Drills, proper cooling is a key point.



1. Choice: Emulsion
2. Choice: Oil

 If you have any further technical questions, please do not hesitate to contact us by phone or e-mail!
Phone: +49(0)6301 32011-0
Mail: info@diamond-toolingsystems.com

Cutting Parameters

for our Solid CBN Reamers



| | | Solid CBN Reamers | | | | | | |
|--------------------------------|------|---------------------------|---------------|---------------|---------------|---------------|---------------|---------------|
| Material | | | Ø 1,5 | Ø 2 | Ø 3 | Ø 4 | Ø 5 | Ø 6 |
| | | V _c [m/min] | F [mm/rev] | F [mm/rev] | F [mm/rev] | F [mm/rev] | F [mm/rev] | F [mm/rev] |
| Steel, hardened 48-55 HRC | min. | 10 | 0,010 | 0,010 | 0,020 | 0,030 | 0,030 | 0,030 |
| | max. | 30 | 0,030 | 0,040 | 0,070 | 0,070 | 0,090 | 0,090 |
| Steel, hardened 55-60 HRC | min. | 10 | 0,010 | 0,010 | 0,020 | 0,030 | 0,030 | 0,030 |
| | max. | 25 | 0,030 | 0,040 | 0,070 | 0,070 | 0,090 | 0,090 |
| Steel, hardened 60-72 HRC | min. | 10 | 0,010 | 0,010 | 0,030 | 0,030 | 0,030 | 0,030 |
| | max. | 25 | 0,030 | 0,030 | 0,070 | 0,070 | 0,090 | 0,090 |
| Tool and PM Steel, up to 72HRC | min. | 10 | 0,010 | 0,010 | 0,030 | 0,030 | 0,030 | 0,030 |
| | max. | 30 | 0,030 | 0,030 | 0,070 | 0,070 | 0,090 | 0,090 |
| Casting | min. | 25 | 0,010 | 0,010 | 0,030 | 0,030 | 0,030 | 0,030 |
| | max. | 55 | 0,020 | 0,020 | 0,070 | 0,070 | 0,090 | 0,090 |
| Carbide | min. | on request | | | | | | |
| | max. | on request | | | | | | |

Cooling Recommended

While machining with Solid CBN Reamers, proper cooling is a key point.




1. Choice: Emulsion or Oil

 If you have any further technical questions, please do not hesitate to contact us by phone or e-mail!
Phone: +49(0)6301 32011-0
Mail: info@diamond-toolingsystems.com

Formulas

Drilling and Reaming

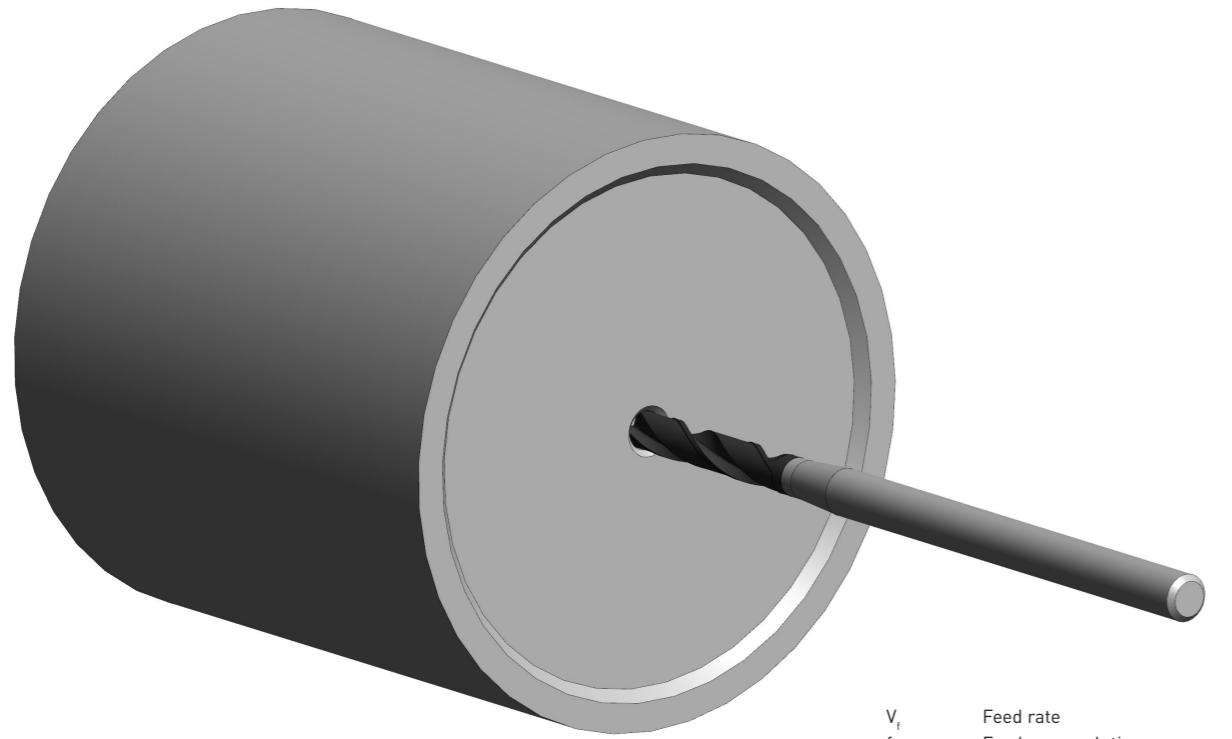

| | | |
|-------|---------------------|----------------------|
| v_c | Feed rate | mm/min |
| f_n | Feed per revolution | mm/rev |
| n | Spindle speed | rev/min |
| v_c | Cutting speed | m/min |
| D_c | Cutter diameter | mm |
| t_c | Cutting Time | min |
| l_m | Cutting length | mm |
| Q | Stock removal rate | cm ³ /min |
| a_p | Cutting depth | mm |

► Cutting speed

$$V_c = \frac{D_c \times \pi \times n}{1000} \quad [\text{m/min}]$$

► Spindle speed

$$n = \frac{v_c \times 1000}{\pi \times D_c} \quad [\text{rev/min}]$$

► Feed per revolution

$$f_n = \frac{V_c}{n} \quad [\text{mm/rev}]$$

► Cutting time

$$t_c = \frac{l_m}{f_n \times n} \quad [\text{min}]$$


► Stock removal rate

$$Q = \frac{v_c \times D_c \times n^2}{4 \times 1000} \quad [\text{cm}^3/\text{min}]$$


Your Notes

A large, empty grid consisting of a 20x20 arrangement of small squares, intended for users to write their own notes or calculations.


Your Notes

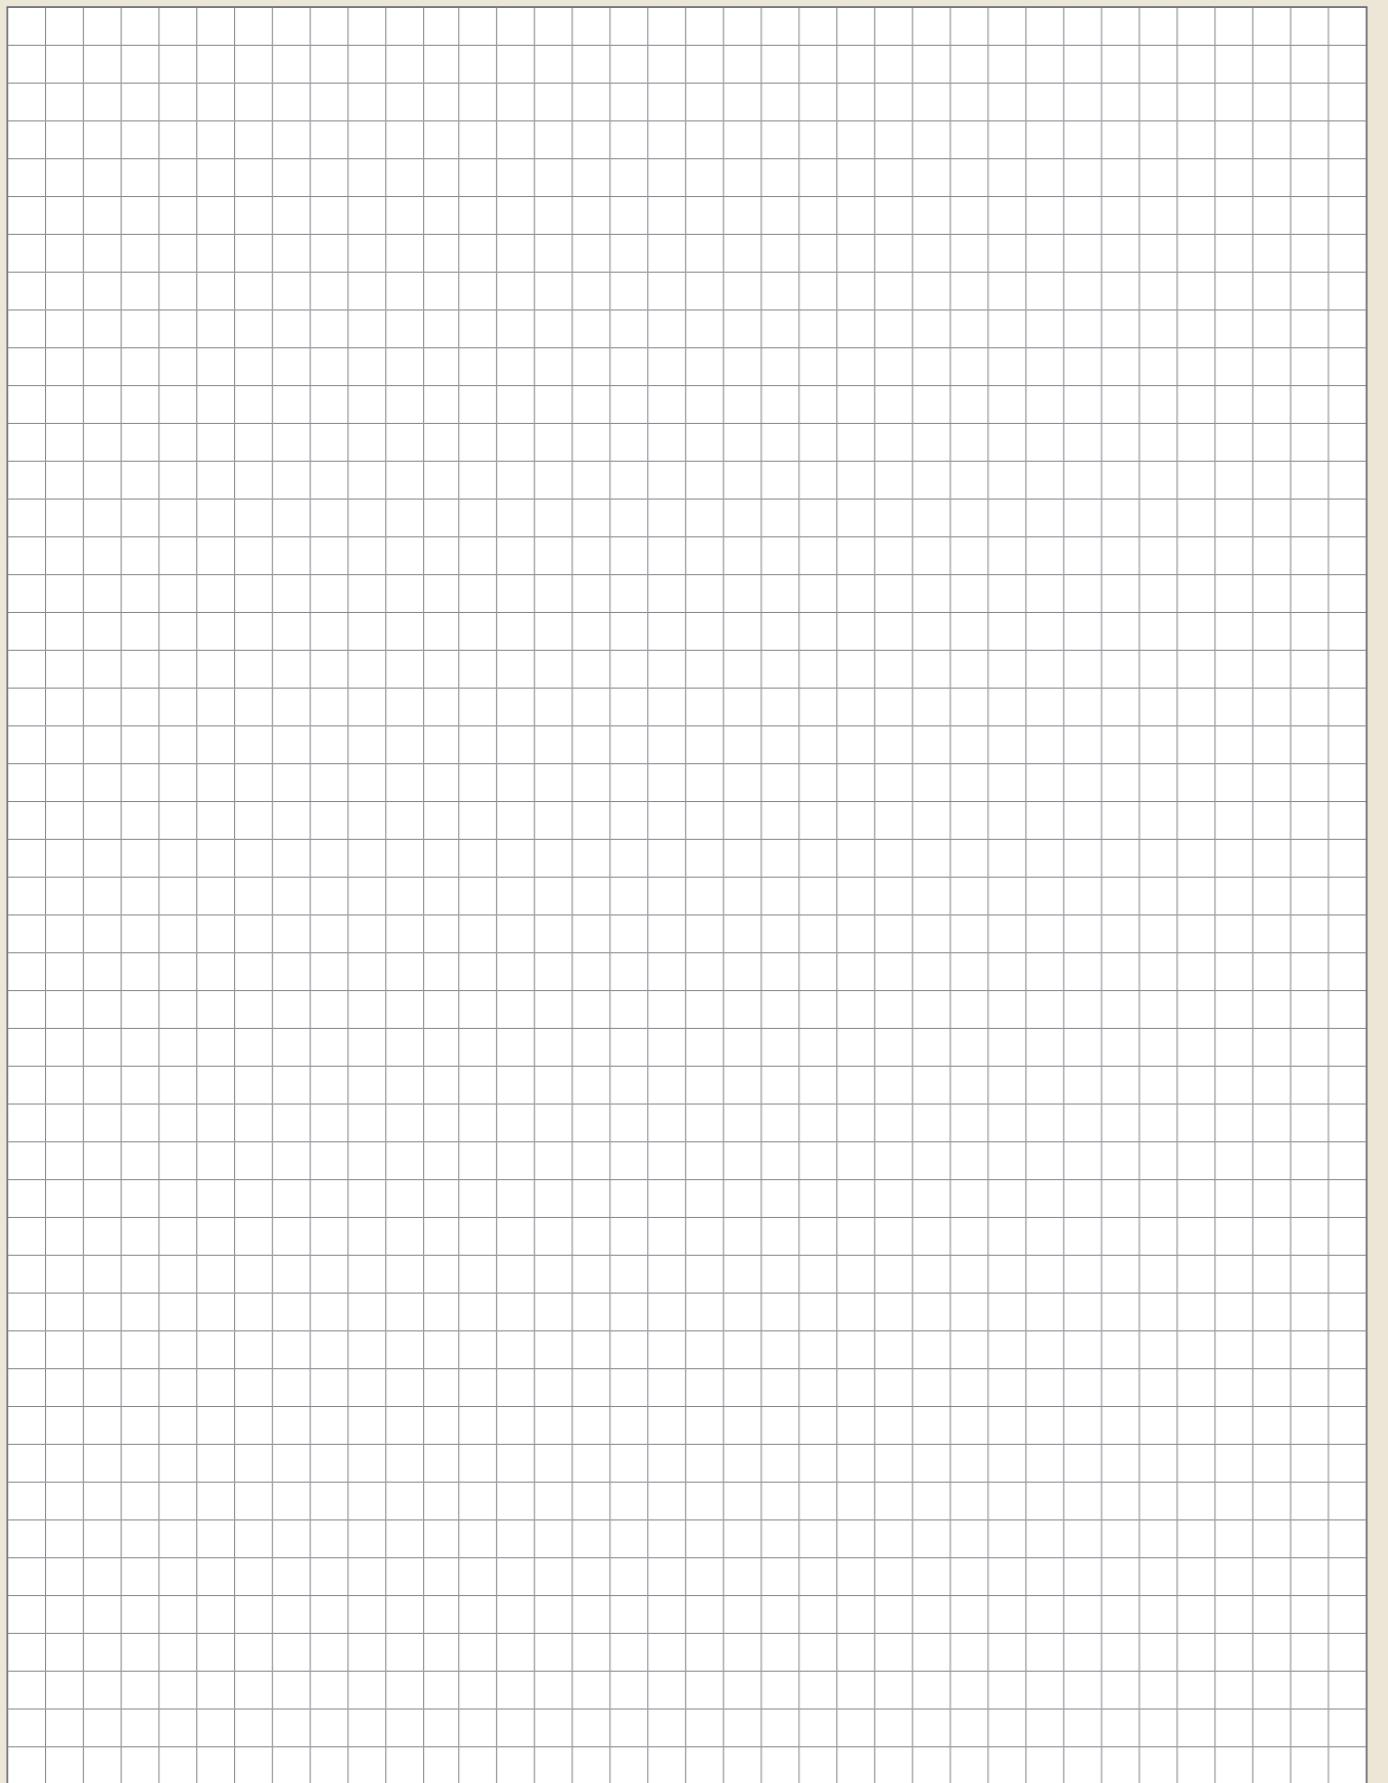A large grid of squares, approximately 20 columns by 25 rows, designed for handwritten notes.


Your Notes

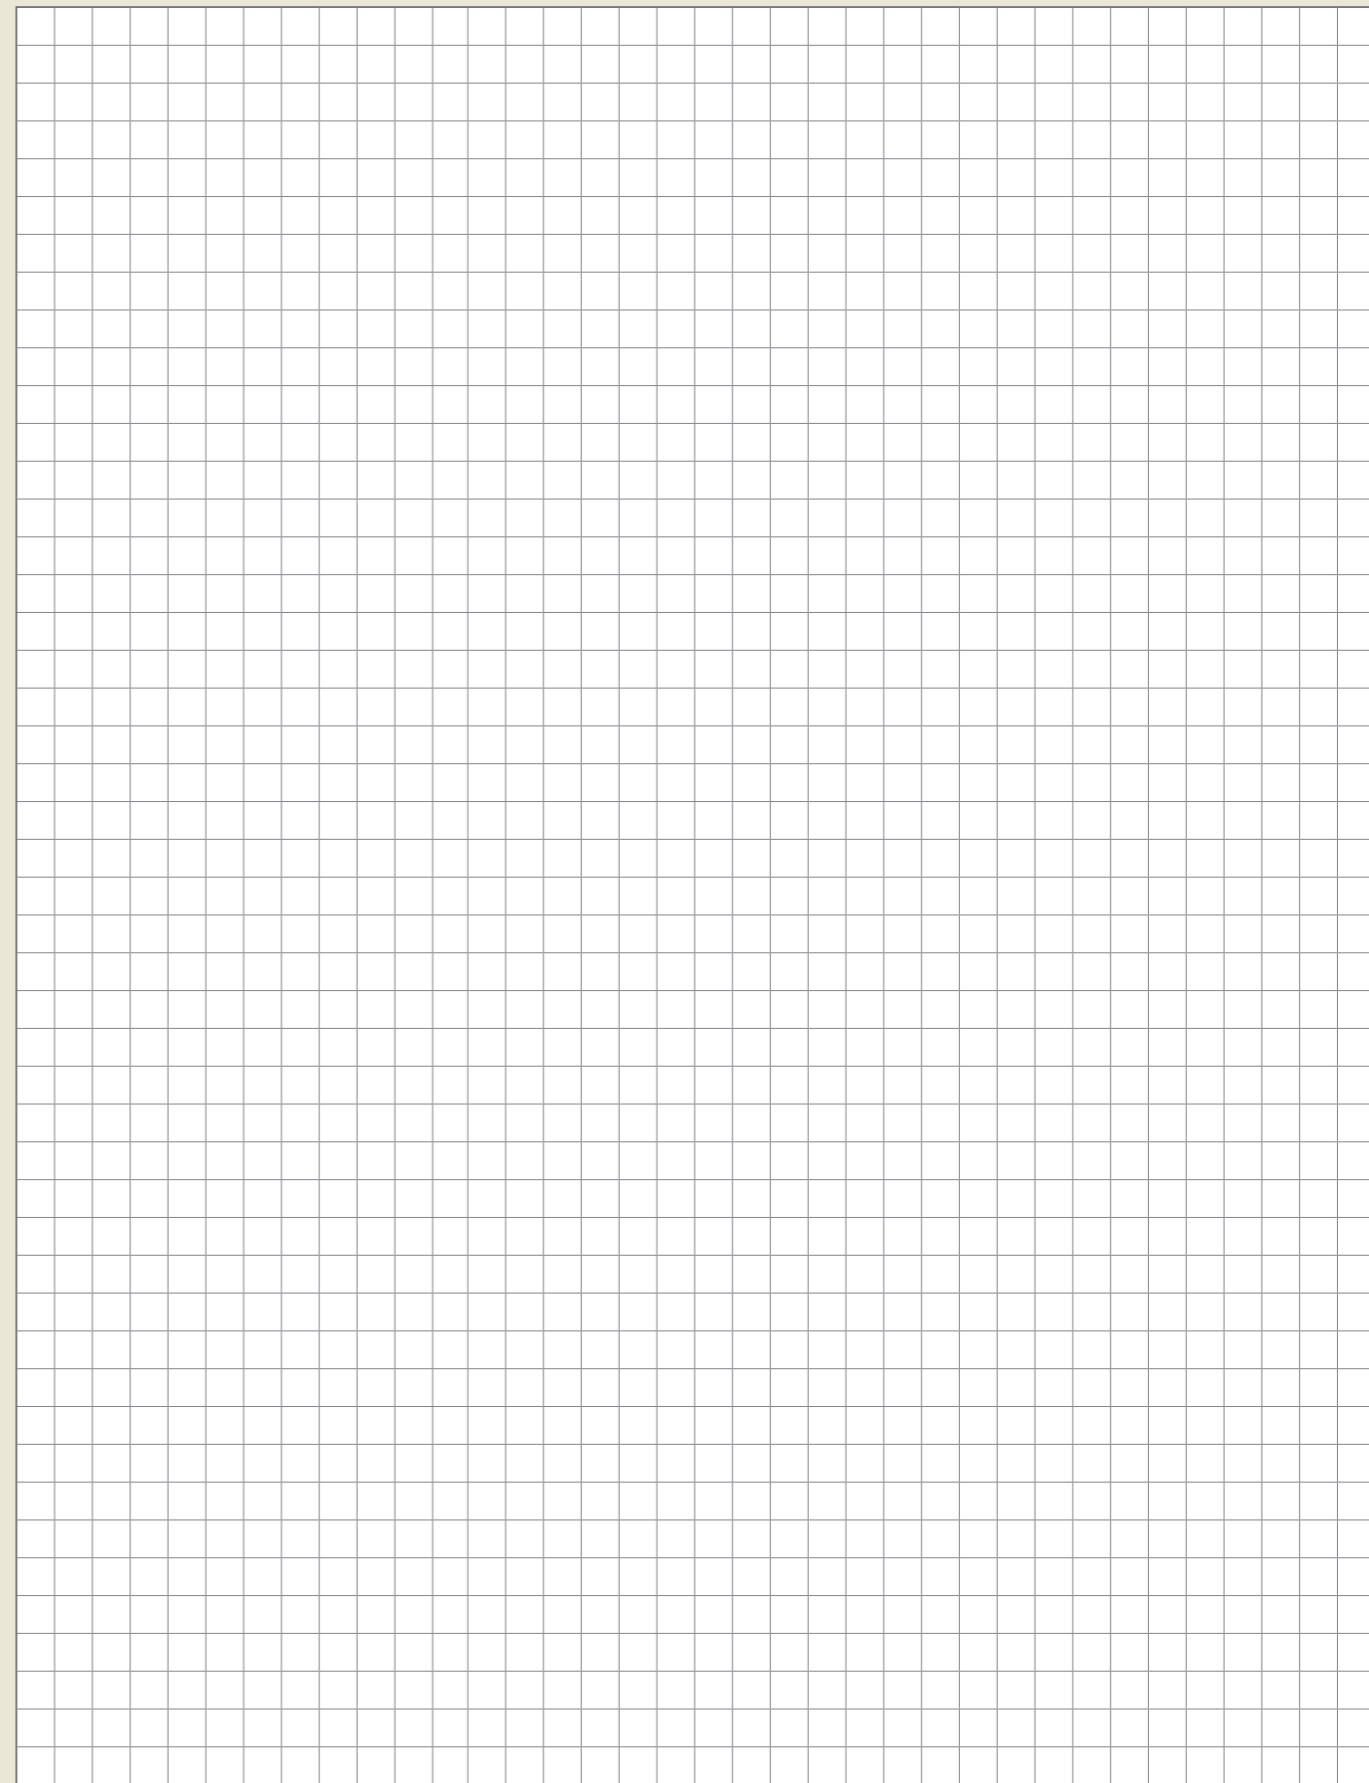
A large grid of squares, approximately 20 columns by 25 rows, designed for handwritten notes.

Your Notes

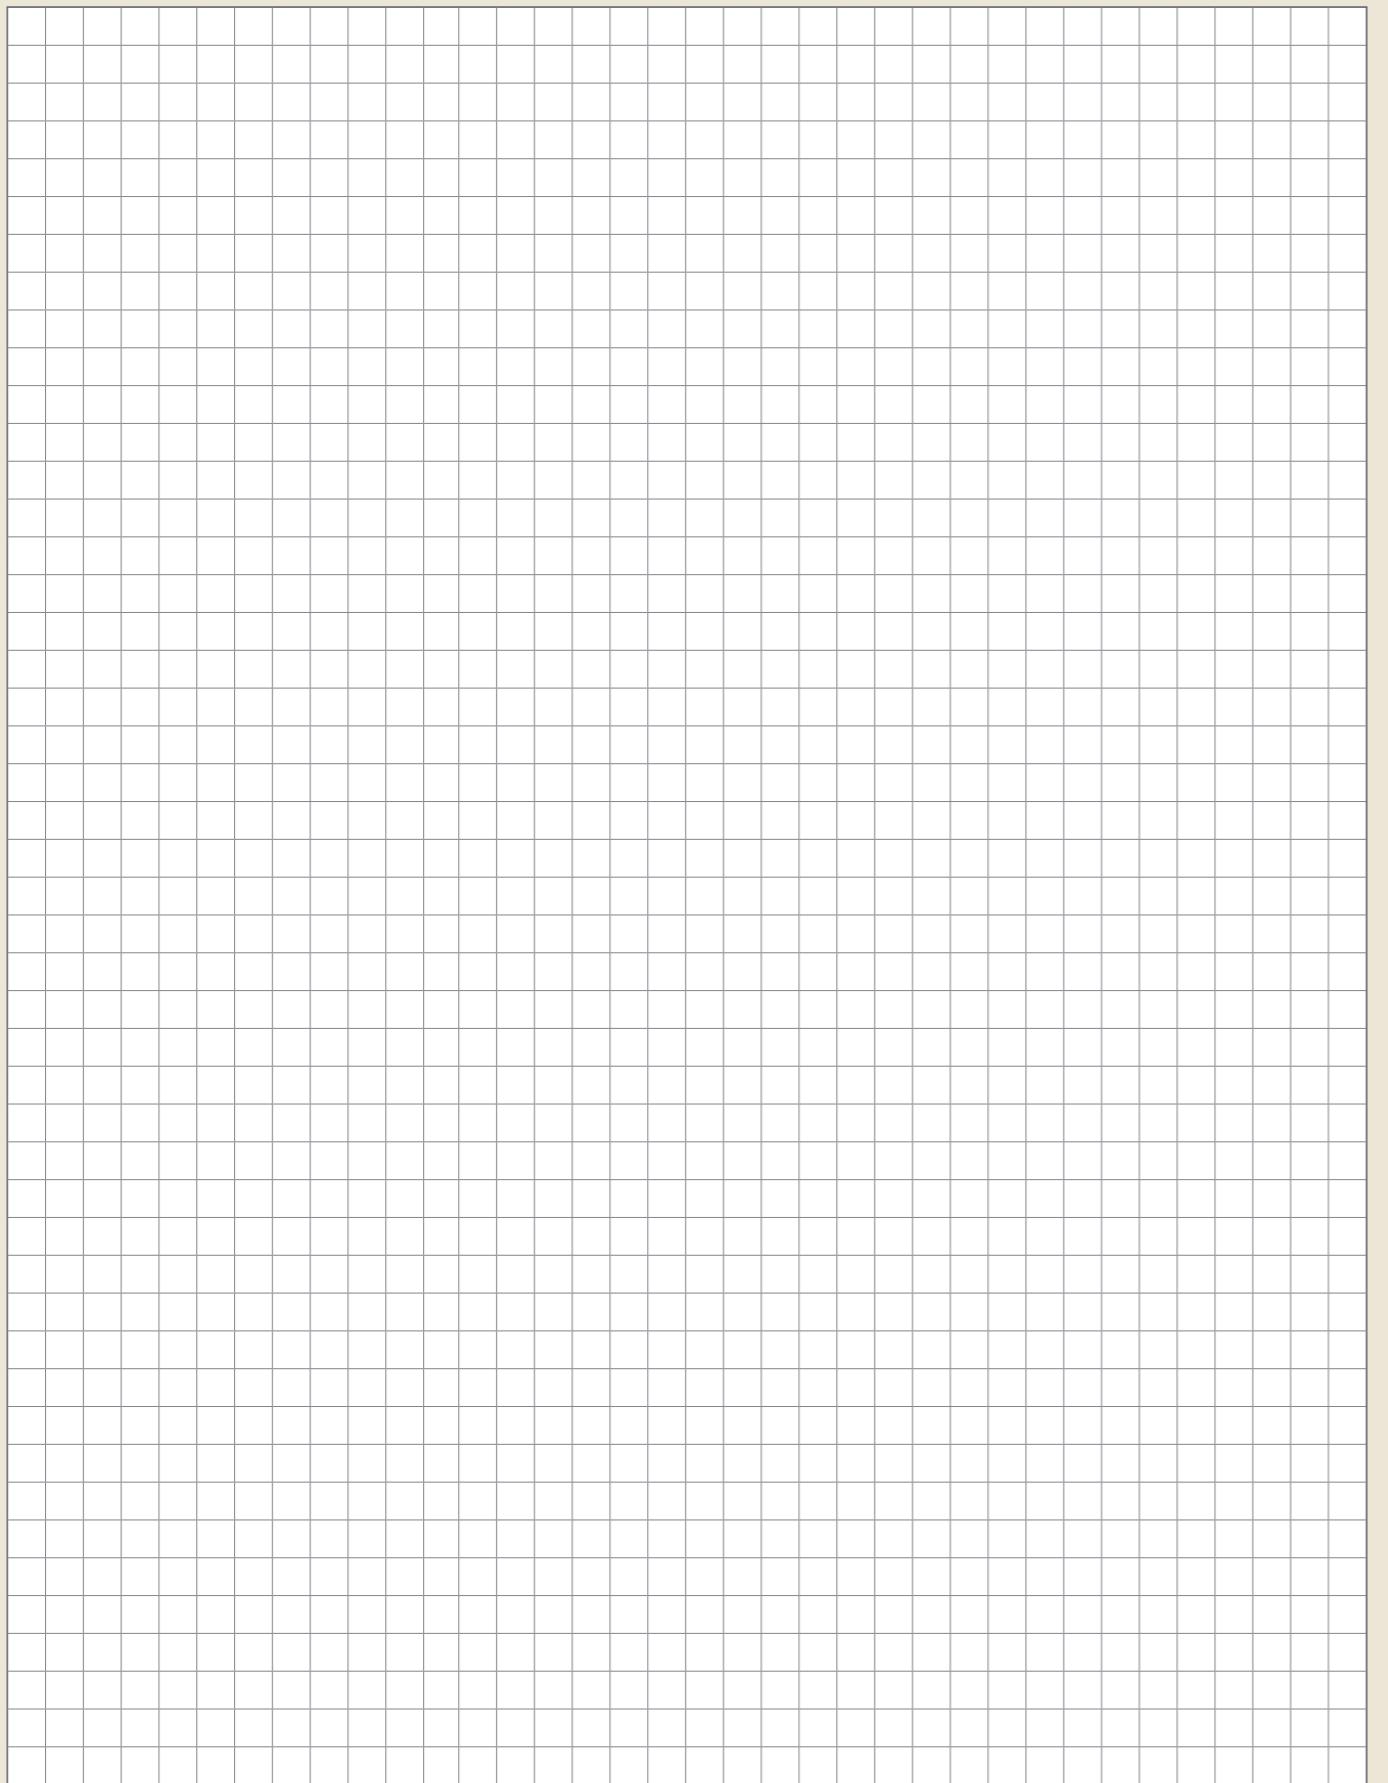A large grid of squares, approximately 20 columns by 25 rows, designed for handwritten notes.

Your Notes

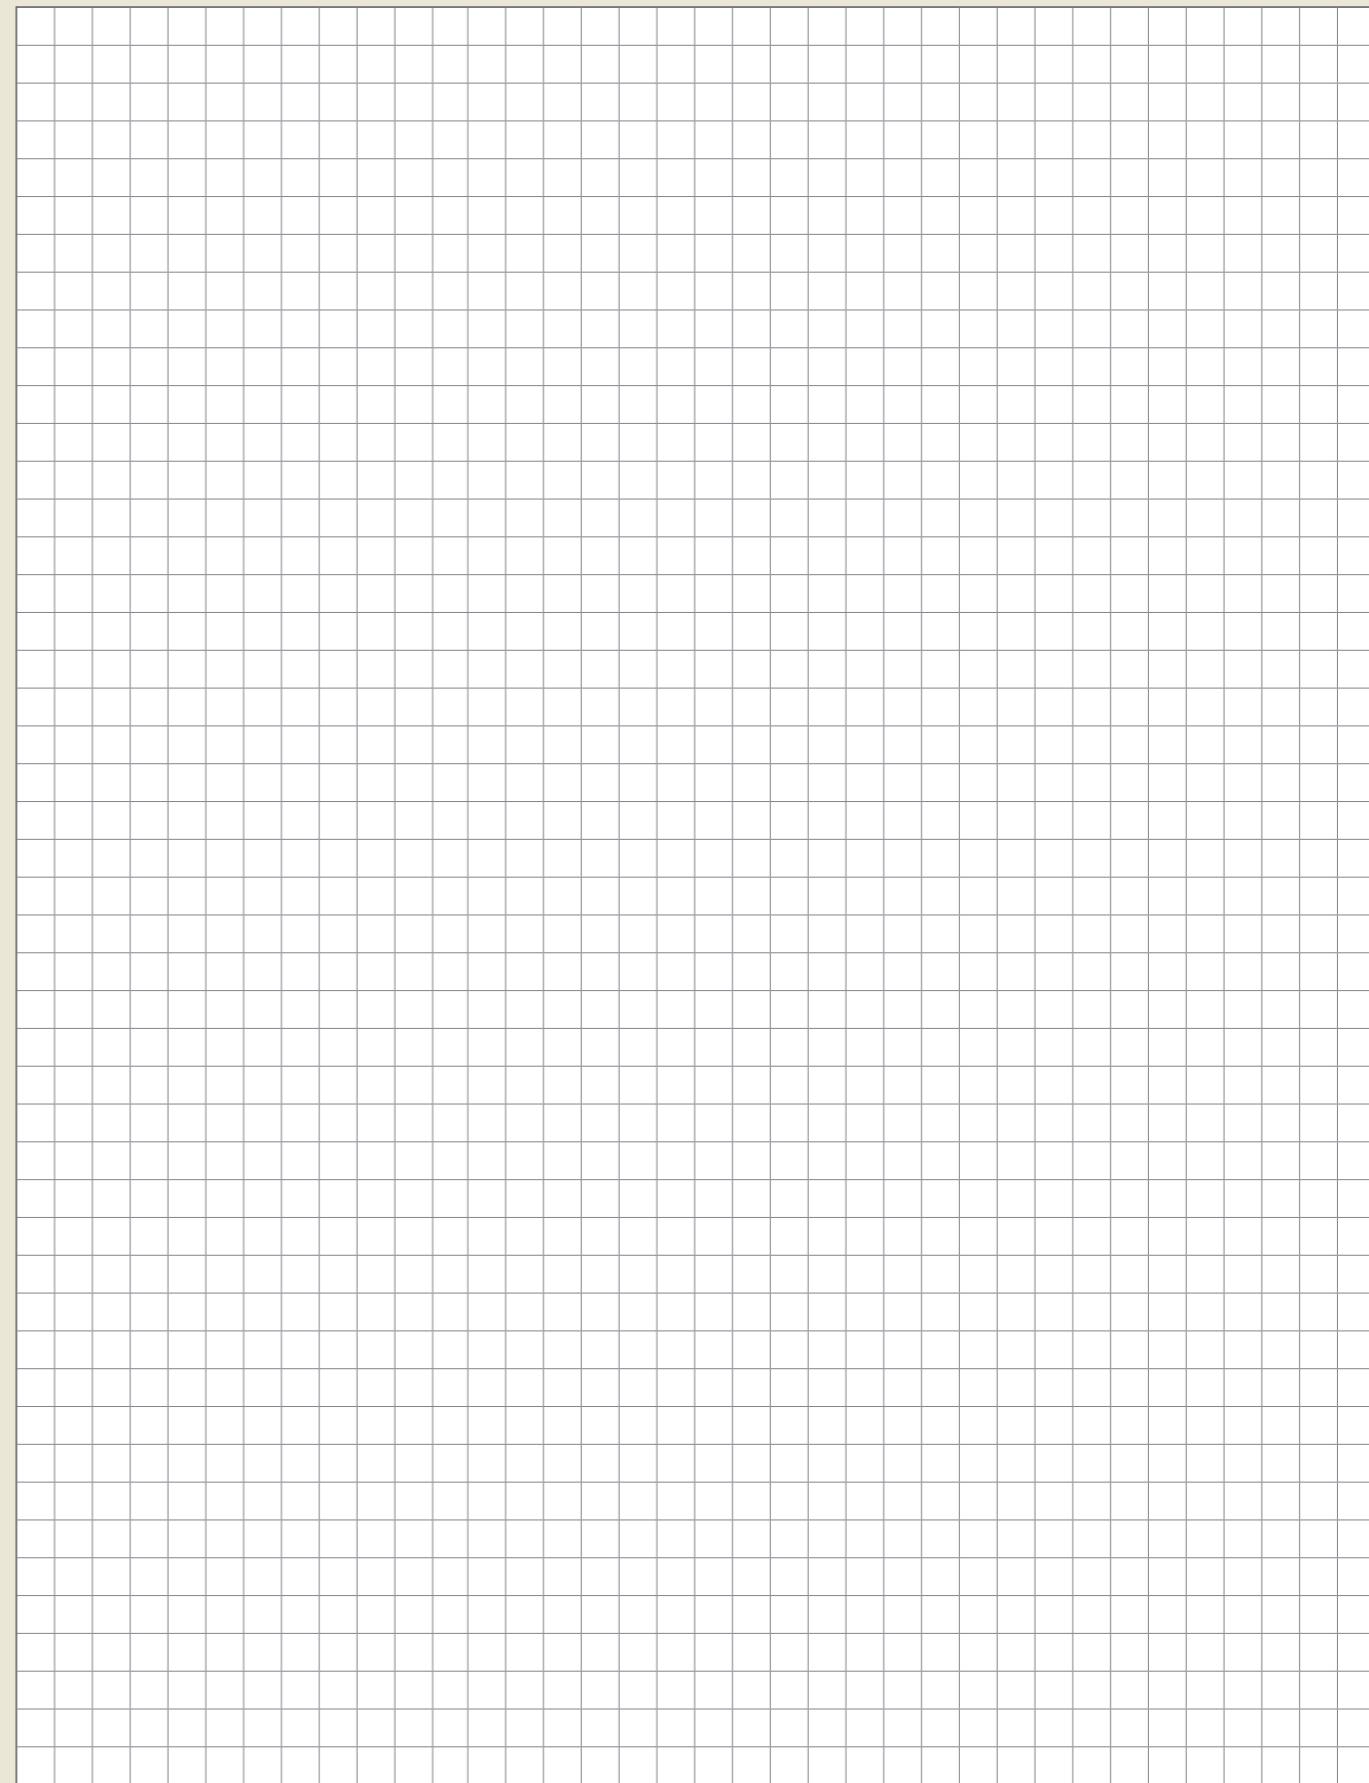A large grid of squares, approximately 20 columns by 25 rows, designed for handwritten notes.

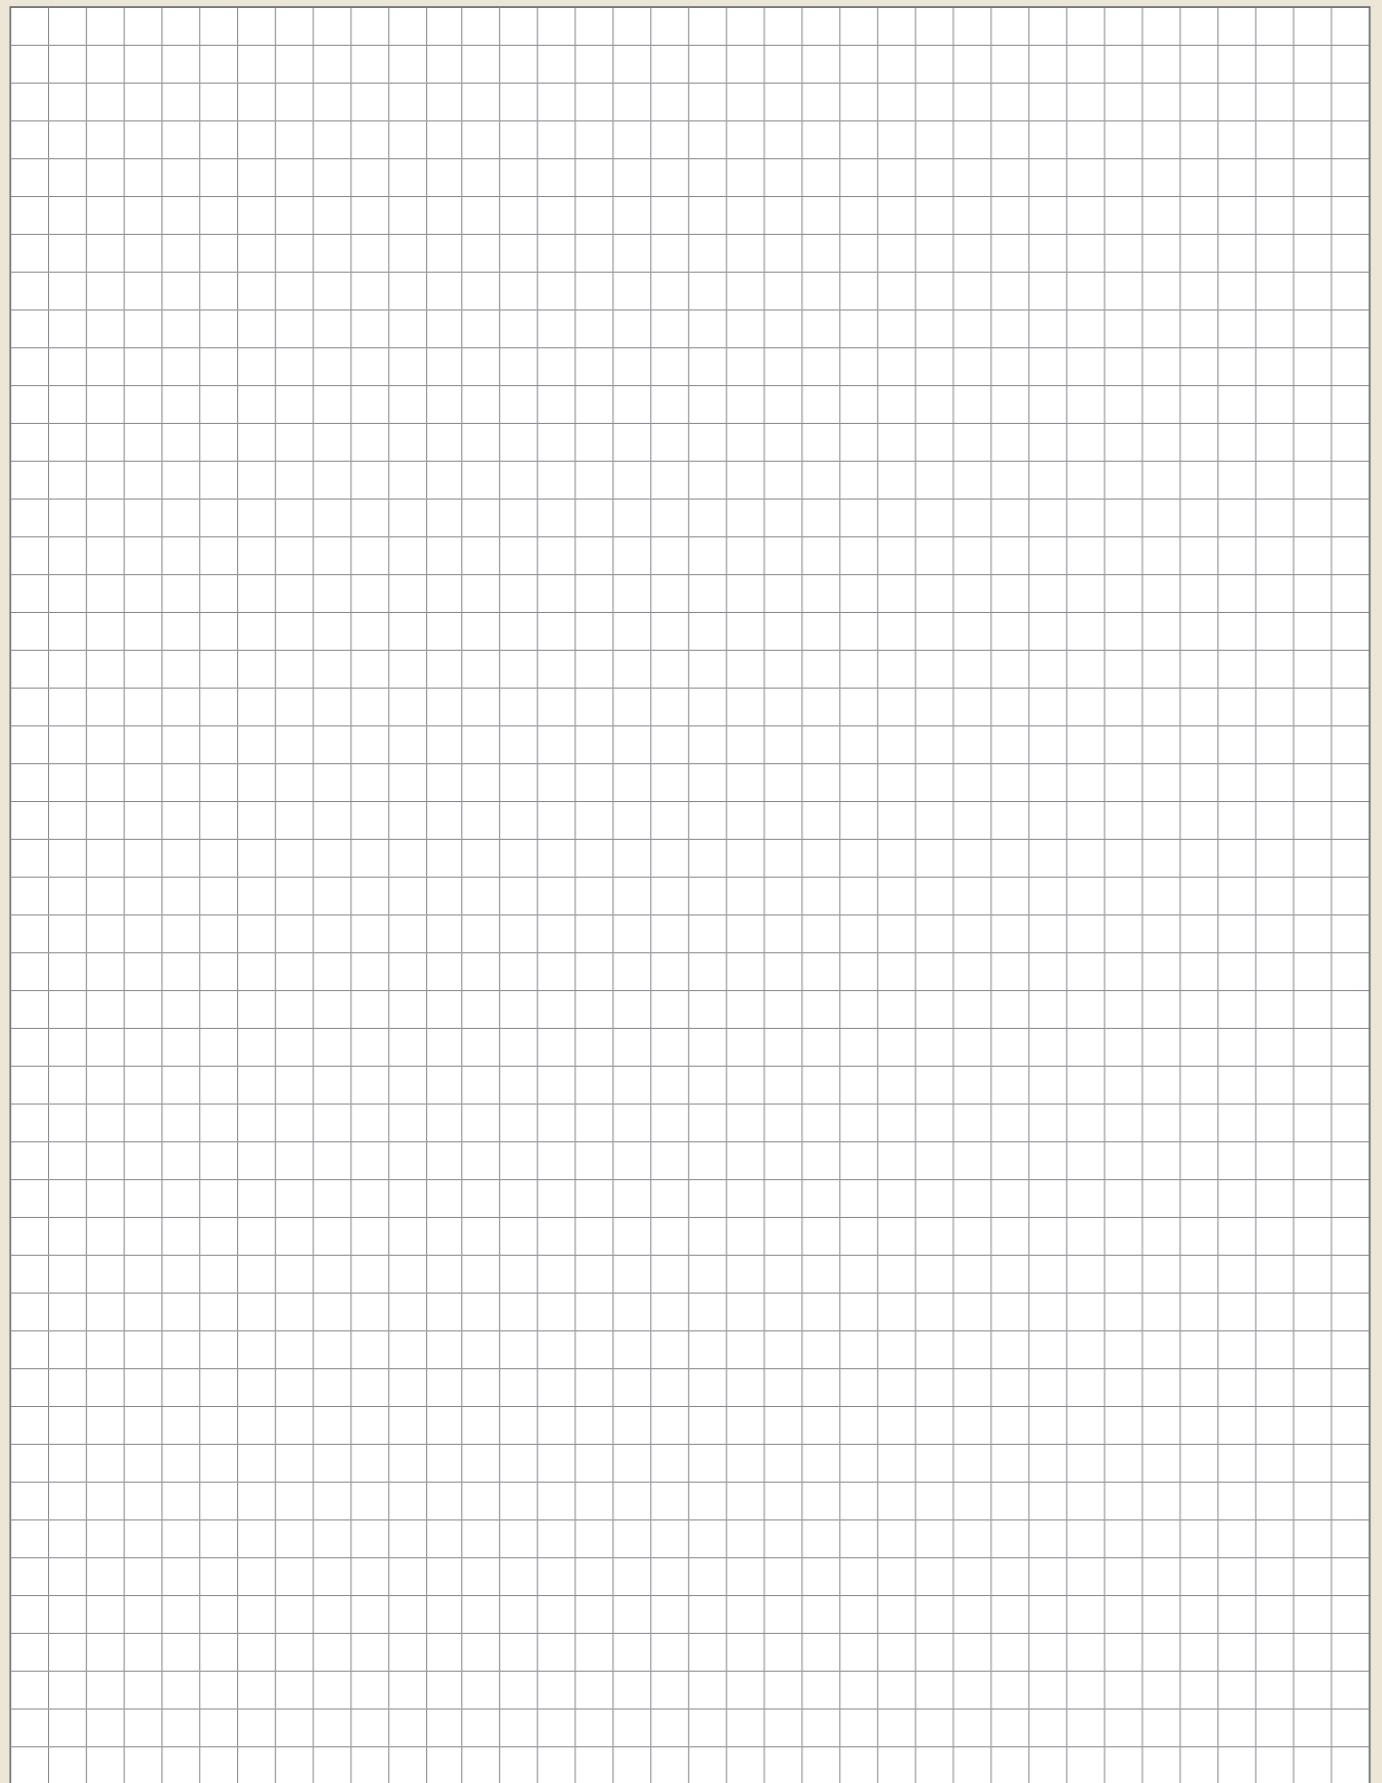

Copyright:

The reprint of our catalogs, copies of our flyers and newsletters or only excerpts such as illustrations, designs, technical information and design require the written permission of DTS GmbH. Copies or only excerpts such as illustrations, designs, technical information from our homepage and our online store are only permitted with the written consent of DTS GmbH.

All rights are reserved. Errors, misprints or printing errors do not entitle to claims. The pictorial and graphic representation of our tools do not necessarily have to correspond to the actual tool in all details.

We reserve the right to make production-related technical changes and changes to the delivery program. The cutting values given are guide values which must be adjusted according to the process environment.

Safety Instructions:

- ▶ DTS tools equipped with ultra-hard cutting edges are very sharp laser cut tools.
- ▶ Careful handling of the tools during unpacking and their use is recommended.
- ▶ Wearing protective gloves reduces the risk of injury.
- ▶ Material chipping and tool breakage may occur during machining, wearing safety glasses is recommended.
- ▶ Balanced holders are recommended for speeds above 10,000 rpm.
- ▶ We do not accept any responsibility for tools that have been modified, reground or used incorrectly and beyond their normal service life.
- ▶ Protective goggles are recommended when using DTS tools, sparks may also occur, make sure that no fire can occur.



TYSON TOOL®

75 Ormont Drive, Toronto, ON. M9L 2S3
Tel: 416.746.3688 • Fax: 416-746-5415
sales@tysontool.com • www.tysontool.com



YouTube



LinkedIn



DTS Shop DTS Website



PASSION FOR DIAMOND

Hans-Geiger-Straße 11a · D-67661 Kaiserslautern

+49 (0) 6301 32011-0
+49 (0) 6301 32011-90

info@diamond-toolingsystems.com

Homepage: www.diamond-toolingsystems.com

Shop: www.diamond-tools24.com